


– DEALER CERTIFICATE –

**This is to certify that the company
AAA INTERNATIONAL
(Proprietor: Gopal Jha)**

Noida, Gautam, Buddha Nagar, 201301, India

**is an authorised distributor of
Heckmondwike FB Fibre Bonded Carpets and Carpet
Tiles and is entitled to promote, sell and install these
products in India until further notice.**



Mr. Adrian WAKE

Export Sales Manager

Heckmondwike FB | Paragon Carpet Tiles | Mat.Works

(Divisions of National Floorcoverings Ltd.)

T: +44 (0)7768 164165

W: www.nfcltd.uk | www.heckmondwike-fb.co.uk | www.paragon-carpets.co.uk |

www.paragon-carpets.co.uk/matworks

Date of issue: 1st January 2022



H

HECKMONDWIKE

MANUFACTURERS OF FIBRE BONDED CARPETS



MADE IN THE UK.
MADE TO LAST.

EDUCATION | RESIDENTIAL | COMMERCIAL

FIBRE BONDED
CARPETS AND TILES

Supacord	6
Broadrib	10
Hobnail	12
Iron Duke	14
Wellington Velour	16

CREATIVE RANGE
CARPET TILES

Array	20
Odyssey	24

ENTRANCE & TRANSITION
CARPETS AND TILES

Battleship/Hippo	30
Dreadnought	34
Diamond	36
Vanquisher	38
Zephyr	40
Sticks & Stones	40

SPECIALIST
CARPETS, TILES & MATS

Bespoke Logo	44
Wellington Loose Lay Classroom Mats	46
Expo Tiles	46
Fusion	48

SECTOR EXPERTISE

Including information on RIBA-accredited CPDs

Education	52
Apartments	54
Architecture & Development	56

TECHNICAL SERVICES

58

HECKMONDWIKE & THE ENVIRONMENT

60

CONTACTS

62



FIBRE BONDED

- SUPACORD
- BROADRIB
- HOBNAIL
- IRON DUKE
- WELLINGTON VELOUR



HOBNAIL



WELLINGTON VELOUR



SUPACORD













































IRON DUKE






S

SUPACORD


Supacord is a heavy contract fibre bonded floorcovering and can be found in education, universities, libraries, apartment block communal areas, office environments, retail outlets, and public sector buildings.

 LRV 3.69	 LRV 1.97	 LRV 8.67	 LRV 5.57	 LRV 4.2	 LRV 7.67	 LRV 4.96
ANTHRACITE	GRAPHITE	STEEL GREY	KINGSTON GREY	FLINT	SEAL	ACORN
 LRV 7.67	 LRV 5.62	 LRV 5.98	 LRV 4.58	 LRV 3.69	 LRV 2.81	 LRV 3.52
LAVENDER	HEATHER	MOORLAND	CLARET	DAMSON	MULBERRY	MAGENTA
 LRV 7.11	 LRV 7.12	 LRV 5.85	 LRV 6.84	 LRV 3.84	 LRV 1.86	 LRV 6.13
VIOLET	BLUE	COBALT	COBALT	COBALT	COBALT	COBALT
 LRV 6.73	 LRV 5.84	 LRV 5.13	 LRV 4.73	 LRV 4.75	 LRV 5.2	 LRV 6.98
AZURE	KINGFISHER	ASTRA BLUE	BLUEBERRY	PURPLE	AMETHYST	MOONLIGHT
 LRV 7.23	 LRV 9.53	 LRV 6.02	 LRV 8.15	 LRV 21.08	 LRV 5.68	 LRV 5.68
ONYX	AQUAMARINE	OPAL	GUNMETAL	SAFARI	SHERWOOD GREEN	PALE OLIVE
 LRV 7.23	 LRV 9.53	 LRV 6.02	 LRV 8.15	 LRV 21.08	 LRV 5.68	 LRV 5.68
EMERALD	WILLOW	RED	ORANGE	YELLOW	GREEN	GREEN

Specification	Supacord	10 YEAR WEAR WARRANTY	
Fibre Construction	80% Polypropylene, 15% Polyamide, 5% Recycled Polyester		
Colour Fastness	Light (BS EN ISO 105:B02) 6 Wet Rubbing (BS EN ISO 105:BO1) 4-5 Dry Rubbing (BS EN ISO 105:X12) 4-5		
Flammability	(BS5287) Assessment and labelling of Textile Floorcoverings tested to BS4790 (Hot Metal Nut Test) - Low Radius of Char BS EN 13501 - Class Cfl-s1 (Sheet), Class Bfl-s1 (Tile), Class Bfl-s1 (Acoustic Tile), Class Cfl-s1 (Plank)		
Antistatic	Suitable for use in computer rooms		
Impact Noise Reduction	BS EN ISO 140-8: 22dB (Sheet) and 21dB (Tile) BS EN ISO 140-8: 23dB (Acoustic Tile)		
Formats	Sheet 	Tile 	Plank 
Backing	-	Bitumen	Bitumen
Size	2 metre and 4 metre, ribbing runs down length of roll	50cm x 50cm	100cm x 25cm
Tiles Per Box	-	20 (5m²) Acoustic Tile - 16 (4m²)	16 (4m²)
Weight	1020gsm	4020gsm Acoustic Tile - 4820gsm	4020gsm
Thickness	6.20mm	7.60mm Acoustic Tile - 12mm	7.60mm



BREEAM® 'A+' Rated

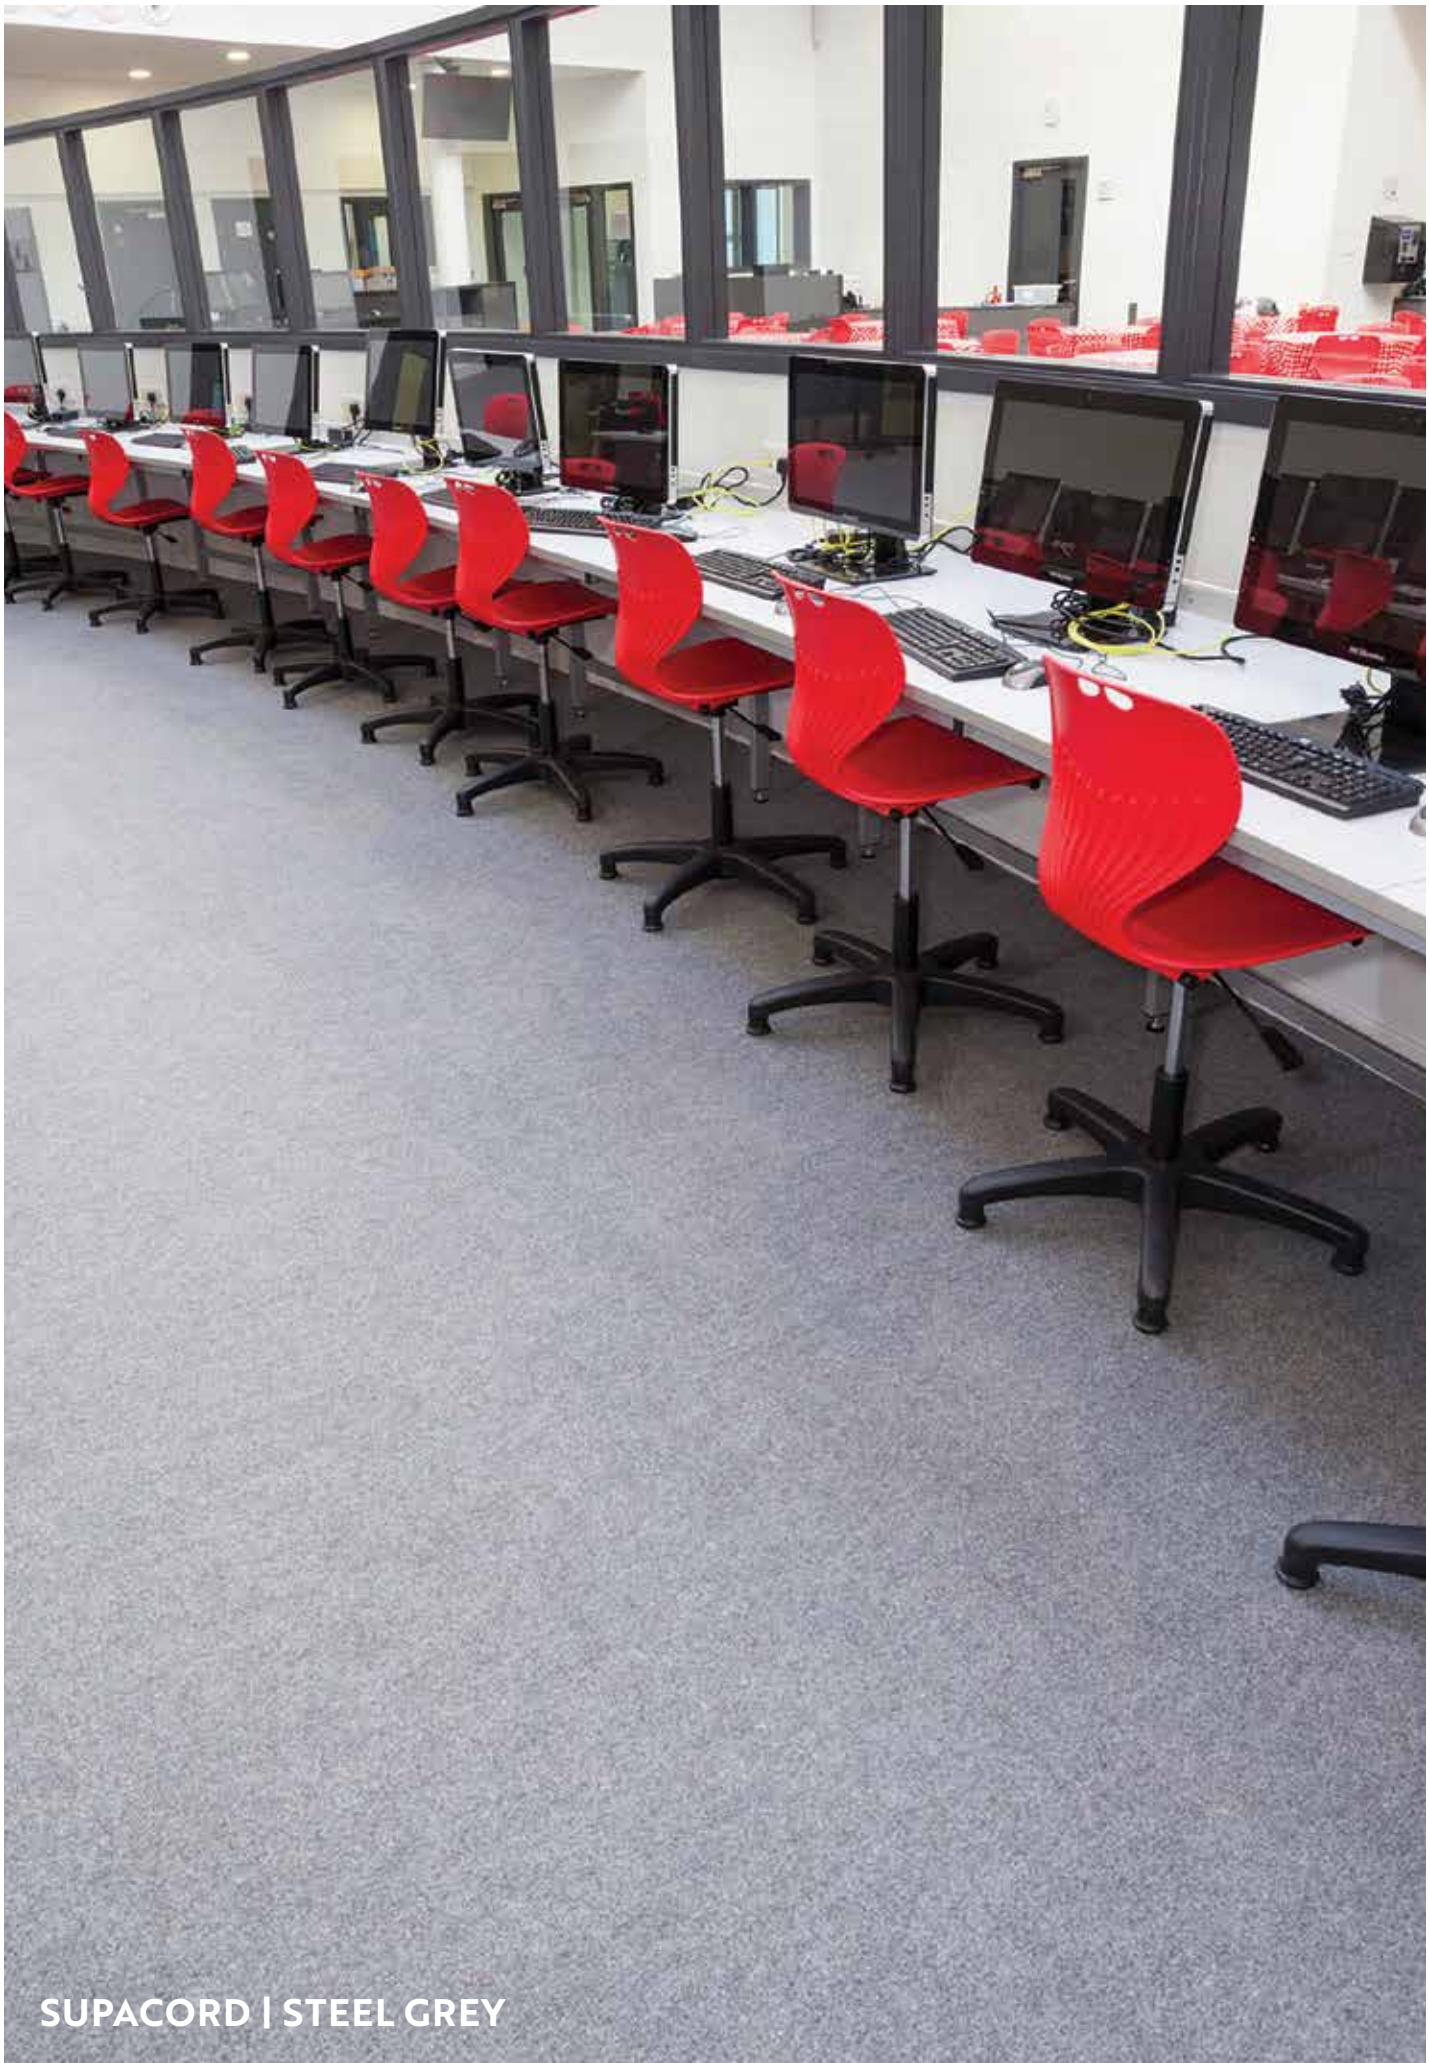


SUPACORD | STEEL GREY



SUPACORD | GREEN



SUPACORD | GRAPHITE, STEEL GREY AND RED

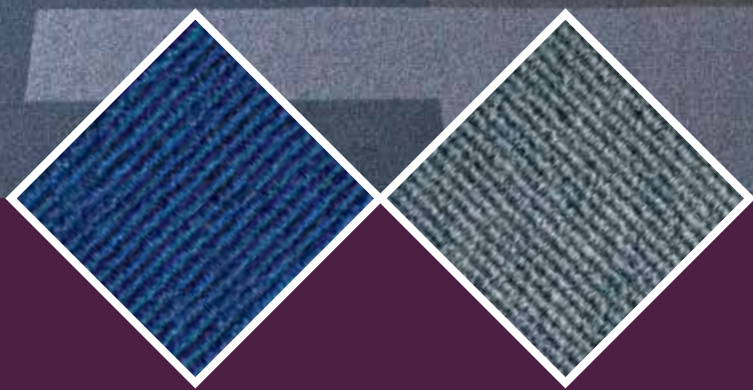

B

BROADRIB

Broadrib is a heavy contract fibre bonded floorcovering and can be found in education, universities, libraries, apartment block communal areas, office environments, retail outlets, and public sector buildings. Its wider rib structure compared to Supacord, creates a more defined texture within the carpet.

 LRV 7.22	 LRV 6.17	 LRV 7.74	 LRV 3.68	 LRV 2.04	 LRV 5.92
AZURE	ONYX	STEEL	ANTHRACITE	GRAPHITE	KINGSTON GREY
 LRV 4.17	 LRV 3.0	 LRV 3.21	 LRV 5.22	 LRV 6.55	 LRV 4.25
FLINT	BLUE	INDIGO	AMETHYST	COBALT	BLUE MOON
 LRV 2.92	 LRV 2.04	 LRV 2.3	 LRV 3.48	 LRV 6.35	 LRV 1.78
PACIFIC BLUE	ASTRA BLUE	CLARET	MAGENTA	VIOLET	PURPLE
 LRV 4.38	 LRV 6.83	 LRV 6.5	 LRV 8.77	 LRV 8.43	 LRV 4.69
BLUEBERRY	EMERALD	PALE OLIVE	WILLOW	PEBBLE	ACORN

Specification	Broadrib			10 YEAR WEAR WARRANTY
Fibre Construction	80% Polypropylene, 15% Polyamide, 5% Recycled Polyester			
Colour Fastness	Light (BS EN ISO 105:B02) >6 Wet Rubbing (BS EN ISO 105:B01) 5 Dry Rubbing (BS EN ISO 105:X12) 5			
Flammability	(BS5287) Assessment and labelling of Textile Floorcoverings tested to BS4790 (Hot Metal Nut Test) - Low Radius of Char BS EN 13501 - Class Cfl-s1 (Sheet), Class Bfl-s1 (Tile), Class Cfl-s1 (Plank)			
Antistatic	Suitable for use in computer rooms			
Impact Noise Reduction	BS EN ISO 140-8: 24dB (Sheet) and 23dB (Tile) BS EN ISO 140-8: 25dB (Acoustic Tile)			
Formats	Sheet ●	Tile ◆	Plank ▬	
Backing	-	Bitumen	Bitumen	
Size	2 metre and 4 metre, ribbing runs down length of roll	50cm x 50cm	100cm x 25cm	
Tiles Per Box	-	20 (5m ²) Acoustic Tile - 16 (4m ²)	16 (4m ²)	
Weight	1020gsm	4020gsm Acoustic Tile - 4820gsm	4020gsm	
Thickness	7.50mm	8mm Acoustic Tile - 12.50mm	8mm	



BREEAM® 'A+' Rated



H


HOBNAIL

Hobnail is a heavy contract fibre bonded floorcovering and can be found in education, universities, libraries, apartment block communal areas, office environments, retail outlets, and public sector buildings. Ideal in communal areas with a non-directional pattern.

 LRV 2.01	 LRV 3.43	 LRV 5.32	 LRV 7.45
CHARCOAL	ANTHRACITE	FLINT	STEEL
 LRV 9.12	 LRV 3.35	 LRV 4.20	 LRV 7.11
SEAL	PACIFIC BLUE	BLUE	COBALT
 LRV 6.26	 LRV 7.22	 LRV 4.09	 LRV 2.56
AMETHYST	AZURE	ARABIAN RED	CLARET
 LRV 1.78	 LRV 5.49	 LRV 5.51	 LRV 8.48
PURPLE	GREEN	SHERWOOD	PEBBLE





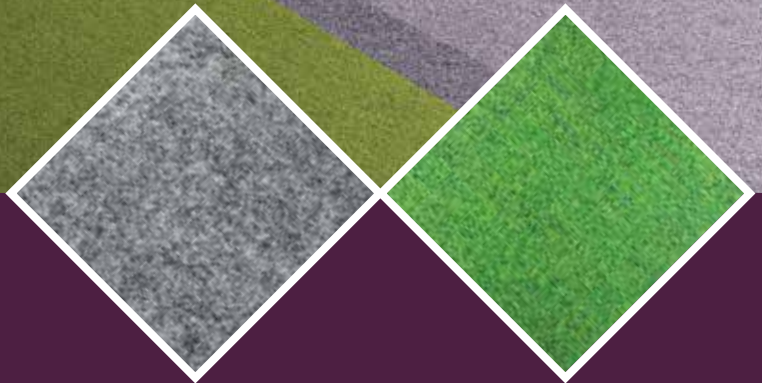










Specification	Hobnail		10 YEAR WEAR WARRANTY
Fibre Construction	80% Polypropylene, 15% Polyamide, 5% Recycled Polyester		
Colour Fastness	Light (BS EN ISO 105:B02) >6 Wet Rubbing (BS EN ISO 105:B01) 5 Dry Rubbing (BS EN ISO 105:X12) 5		
Flammability	(BS5287) Assessment and labelling of Textile Floorcoverings tested to BS4790 (Hot Metal Nut Test) - Low Radius of Char BS EN 13501 - Class Cfl-s1 (Sheet), Class Bfl-s1 (Tile)		
Antistatic	Suitable for use in computer rooms		
Impact Noise Reduction	BS EN ISO 10140-3:2010: 25dB (Sheet) and 24dB (Tile)		
Formats	Sheet ●	Tile ◆	
Backing	-	Bitumen	
Size	2 metre	50cm x 50cm	
Tiles Per Box	-	20 (5m ²)	
Weight	1020gsm	4020gsm	
Thickness	7.20mm	8mm	





IRON DUKE

Iron Duke is a heavy contract fibre bonded floorcovering and can be found in education, universities, libraries, apartment block communal areas, retail outlets, and public sector buildings.

 ANTHRACITE LRV 7.54	 CHARCOAL LRV 3.08	 FLINT LRV 7.27	 DOVE GREY LRV 10.99
 PETROL BLUE LRV 9.45	 BLUE MOON LRV 5.52	 BLUE LRV 5.19	 AMETHYST LRV 8.21
 PURPLE LRV 3.51	 BLUEBERRY LRV 3.79	 CLARET LRV 3.77	 ARABIAN RED LRV 5.29
 LINCOLN GREEN LRV 6.68	 WILLOW LRV 11.36	 CHESTNUT LRV 5.88	 PEBBLE LRV 15.13

Specification	Iron Duke		10 YEAR WEAR WARRANTY
Fibre Construction	80% Polypropylene, 10% Polyamide, 10% Recycled Polyester		
Colour Fastness	Light (BS EN ISO 105:B02) >6 Wet Rubbing (BS EN ISO 105:BO1) 4-5 Dry Rubbing (BS EN ISO 105:X12) 4-5		
Flammability	(BS5287) Assessment and labelling of Textile Floorcoverings tested to BS4790 (Hot Metal Nut Test) - Low Radius of Char BS EN 13501 - Class Dfl-s1 (Sheet), Class Bfl-s1 (Plank)		
Antistatic	Suitable for use in computer rooms		
Impact Noise Reduction	BS EN ISO 140-8: 19dB (Sheet)		
Formats	Sheet <input checked="" type="radio"/>	Plank <input type="radio"/>	
Backing	-	Bitumen	
Size	2 metre and 4 metre	100cm x 25cm	
Tiles Per Box	-	20 (5m²)	
Weight	750gsm	3750gsm	
Thickness	4.75mm	6mm	






W

WELLINGTON VELOUR

Wellington Velour is a heavy contract fibre bonded floorcovering and can be found in education, universities, libraries, apartment block communal areas, office environments, retail outlets, and public sector buildings.

Combining a soft velour texture and high-traffic performance, creates a more defined texture within the carpet while enhanced Impact Noise Reduction properties aids building design.

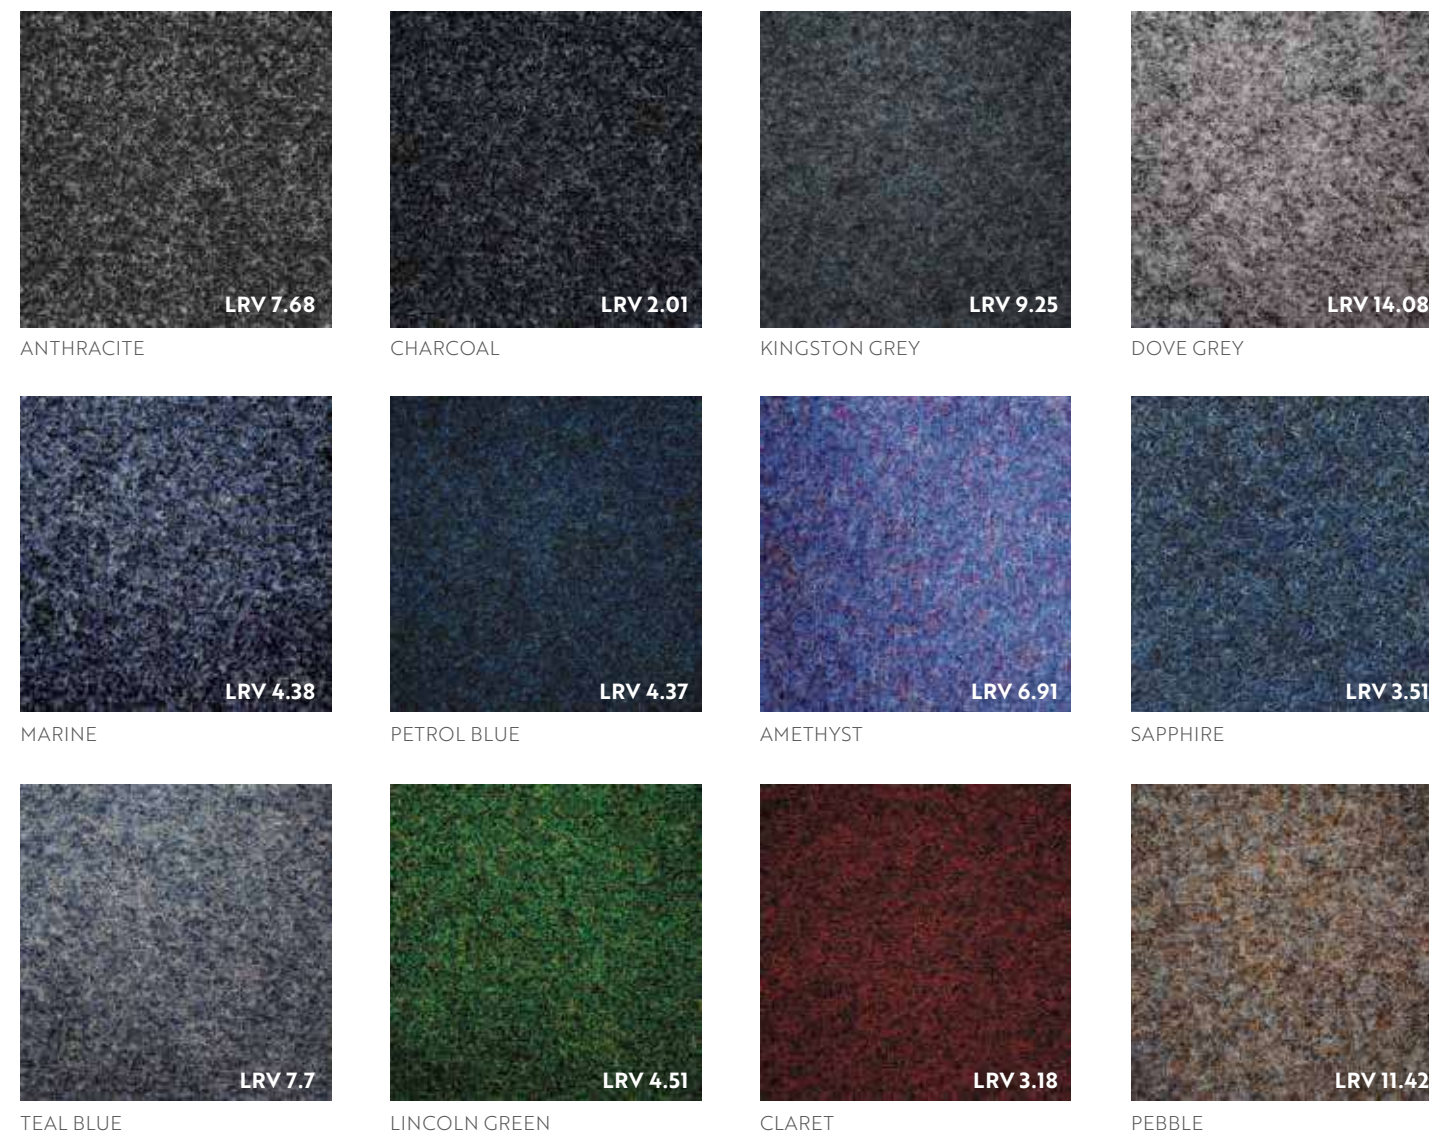

Specification	Wellington Velour		10 YEAR WEAR WARRANTY
Fibre Construction	90% Polypropylene, 10% Recycled Polyester		
Colour Fastness	Light (BS EN ISO 105:B02) >6 Wet Rubbing (BS EN ISO 105:B01) 5 Dry Rubbing (BS EN ISO 105:X12) 5		
Flammability	(BS5287) Assessment and labelling of Textile Floorcoverings tested to BS4790 (Hot Metal Nut Test) - Low Radius of Char BS EN 13501 - Class Efl (Sheet), Class Bfl-s1 (Tile)		
Antistatic	Suitable for use in computer rooms		
Impact Noise Reduction	BS EN ISO 140-8: 24dB (Sheet)		
Formats	Sheet ●	Tile ◆	
Backing	-	Bitumen	
Size	2 metre	50cm x 50cm	
Tiles Per Box	-	16 (4m²)	
Weight	1180gsm	4180gsm	
Thickness	10mm	11.20mm	





CREATIVE RANGE


- ARRAY
- ODYSSEY



ARRAY AND BROADRIB



ARRAY AND BROADRIB

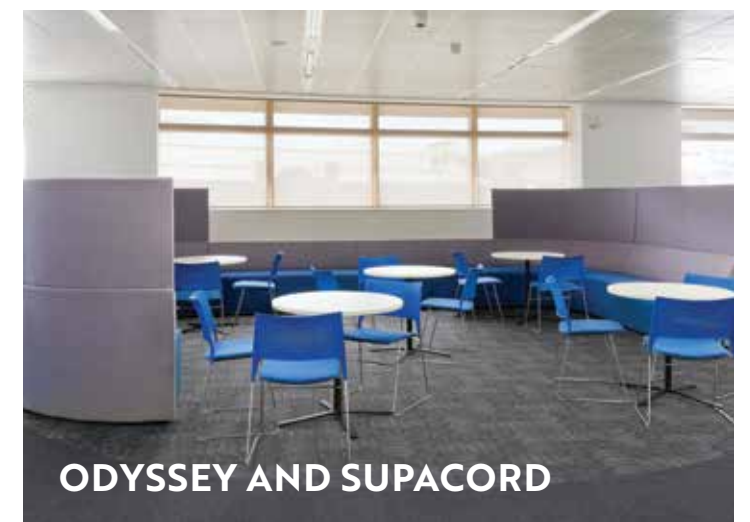

ODYSSEY AND SUPACORD



ARRAY AND BROADRIB



























ARRAY AND BROADRIB





A

ARRAY

Array is a heavy contract fibre bonded floorcovering with a smart linear pattern in a choice of twelve vibrant shades that can be paired with Broadrib for effective design options. Array can be found in education, universities, libraries, apartment block communal areas, office environments, retail outlets, and public sector buildings.

 LRV 3.85	 LRV 3.94	 LRV 4.21	 LRV 4.92
ARRAY BLACK	ARRAY BLUE	ARRAY COPPER	ARRAY EMERALD
 LRV 2.04	 LRV 3.00	 LRV 7.23	 LRV 4.68
BROADRIB GRAPHITE	BROADRIB BLUE	BROADRIB ORANGE	BROADRIB GREEN
 LRV 4.58	 LRV 5.23	 LRV 5.88	 LRV 5.45
ARRAY FUCHSIA	ARRAY LIME	ARRAY MARBLE	ARRAY PEACOCK
 LRV 3.56	 LRV 8.77	 LRV 22.45	 LRV 15.77
BROADRIB FUCHSIA	BROADRIB WILLOW	BROADRIB MARBLE	BROADRIB PEACOCK
 LRV 4.35	 LRV 4.75	 LRV 5.15	 LRV 4.67
ARRAY PURPLE	ARRAY RED	ARRAY MAGENTA	ARRAY VIOLET
 LRV 1.78	 LRV 5.94	 LRV 12.50	 LRV 6.35
BROADRIB PURPLE	BROADRIB RED	BROADRIB CERISE	BROADRIB VIOLET

Specification	Array		10 YEAR WEAR WARRANTY
Fibre Construction	85% Polypropylene, 15% Polyamide		
Colour Fastness	Light (BS EN ISO 105:B02) >6 Wet Rubbing (BS EN ISO 105:BO1) 4-5 Dry Rubbing (BS EN ISO 105:X12) 4-5		
Flammability	(BS5287) Assessment and labelling of Textile Floorcoverings tested to BS4790 (Hot Metal Nut Test) - Low Radius of Char BS EN 13501 - Class Bfl-s1 (Tile), Class Cfl-s1 (Plank)		
Antistatic	Suitable for use in computer rooms		
Impact Noise Reduction	BS EN ISO 140-8: 22dB (Tile)		
Formats	Tile 	Plank 	
Backing	Bitumen	Bitumen	
Size	50cm x 50cm	100cm x 25cm	
Tiles Per Box	16 (4m ²)	14 (3.5m ²)	
Weight	4075gsm	4075gsm	
Thickness	8.5mm	8.5mm	




BREEAM® 'A+' Rated



ARRAY | LIME




ARRAY | BLACK AND BROADRIB | PURPLE

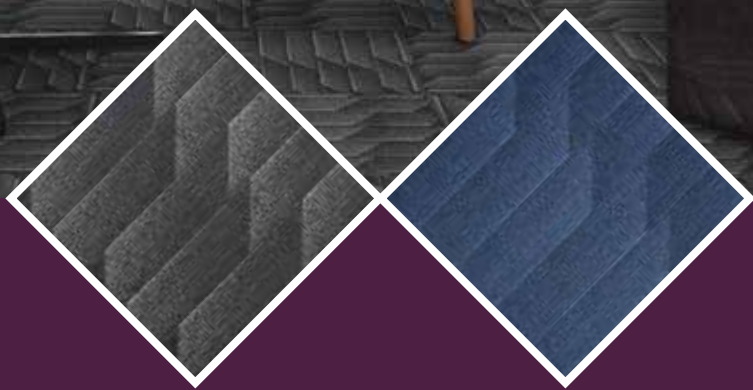


○ ODYSSEY

Unique to the fibre bonded sector, **Odyssey** is a bold and modern carpet, ideal for commercial and education environments. Use the full 42 colourbank of Supacord to enhance your Odyssey design.



ANTHRACITE



GRAPHITE



KINGSTON GREY




INDIGO



PACIFIC BLUE



BLUEBERRY

Specification	Odyssey	10 YEAR WEAR WARRANTY
Fibre Construction	84% Polypropylene, 16% Nylon	
Colour Fastness	Light (BS EN ISO 105:B02) >6 Wet Rubbing (BS EN ISO 105:B01) 5 Dry Rubbing (BS EN ISO 105:X12) 5	
Flammability	(BS5287) Assessment and labelling of Textile Floorcoverings tested to BS4790 (Hot Metal Nut Test) - Low Radius of Char BS EN 13501 - Class Bfl-s1	
Antistatic	Suitable for use in computer rooms	
Impact Noise Reduction	BS EN ISO 140-8: 20dB	
Backing	Bitumen	
Format	Tile 	
Size	50cm x 50cm	
Tiles Per Box	16 (4m²)	
Weight	4200gsm	
Thickness	8.5mm	

Pair with the
42 colours
of Supacord



ENTRANCE & TRANSITION AREA RANGE

- BATTLESHIP/HIPPO
- DREADNOUGHT
- DIAMOND
- VANQUISHER
- ZEPHYR
- STICKS & STONES



BATTLESHIP




STICKS & STONES




VANQUISHER



DREADNOUGHT

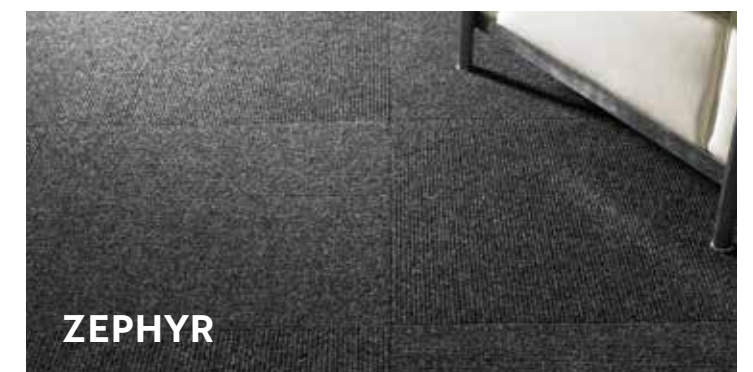

ZEPHYR

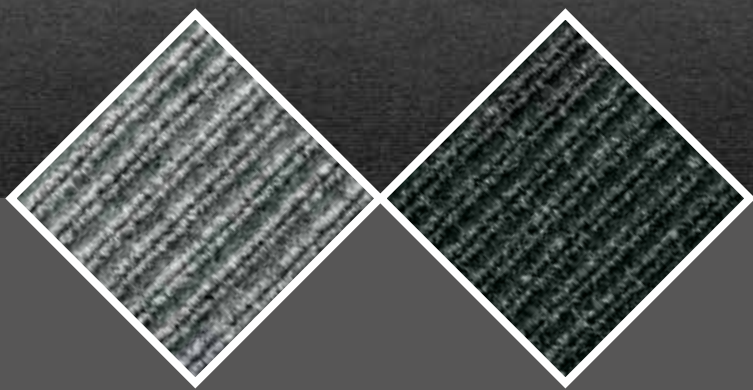


BH

BATTLESHIP/
HIPPO


Battleship and **Hippo** are heavy contract entrance solutions, used extensively in education and public sector buildings as well as entrance transition areas for apartment blocks. In addition, Hippo has a rubber waffle backing, allowing it to be loose laid in small areas or footwells.



ANTHRACITE



ASH GREY



SLATE



INDIGO



BLUE



BROWN



HEATH



PEBBLE


Specification	Battleship/Hippo	5 YEAR WEAR WARRANTY
Fibre Construction	90% Polypropylene, 10% Recycled Polyester	
Colour Fastness	Light (BS EN ISO 105:B02) 6 Wet Rubbing (BS EN ISO 105:BO1) 4-5 Dry Rubbing (BS EN ISO 105:X12) 4-5	
Flammability	(BS6307) Methenamine Pill Test - Pass BS EN 13501 - Class Efl	
Format	Sheet ●	
Backing	Unbacked (Battleship) / Rubber Waffle (Hippo)	
Size	2 metre and 4 metre, ribbing runs down length of roll	
Weight	1495gsm (Battleship) / 2380gsm (Hippo)	
Thickness	10.50mm (Battleship) / 12mm (Hippo)	

Recommended
carpet layout






BATTLESHIP/HIPPO | ANTHRACITE

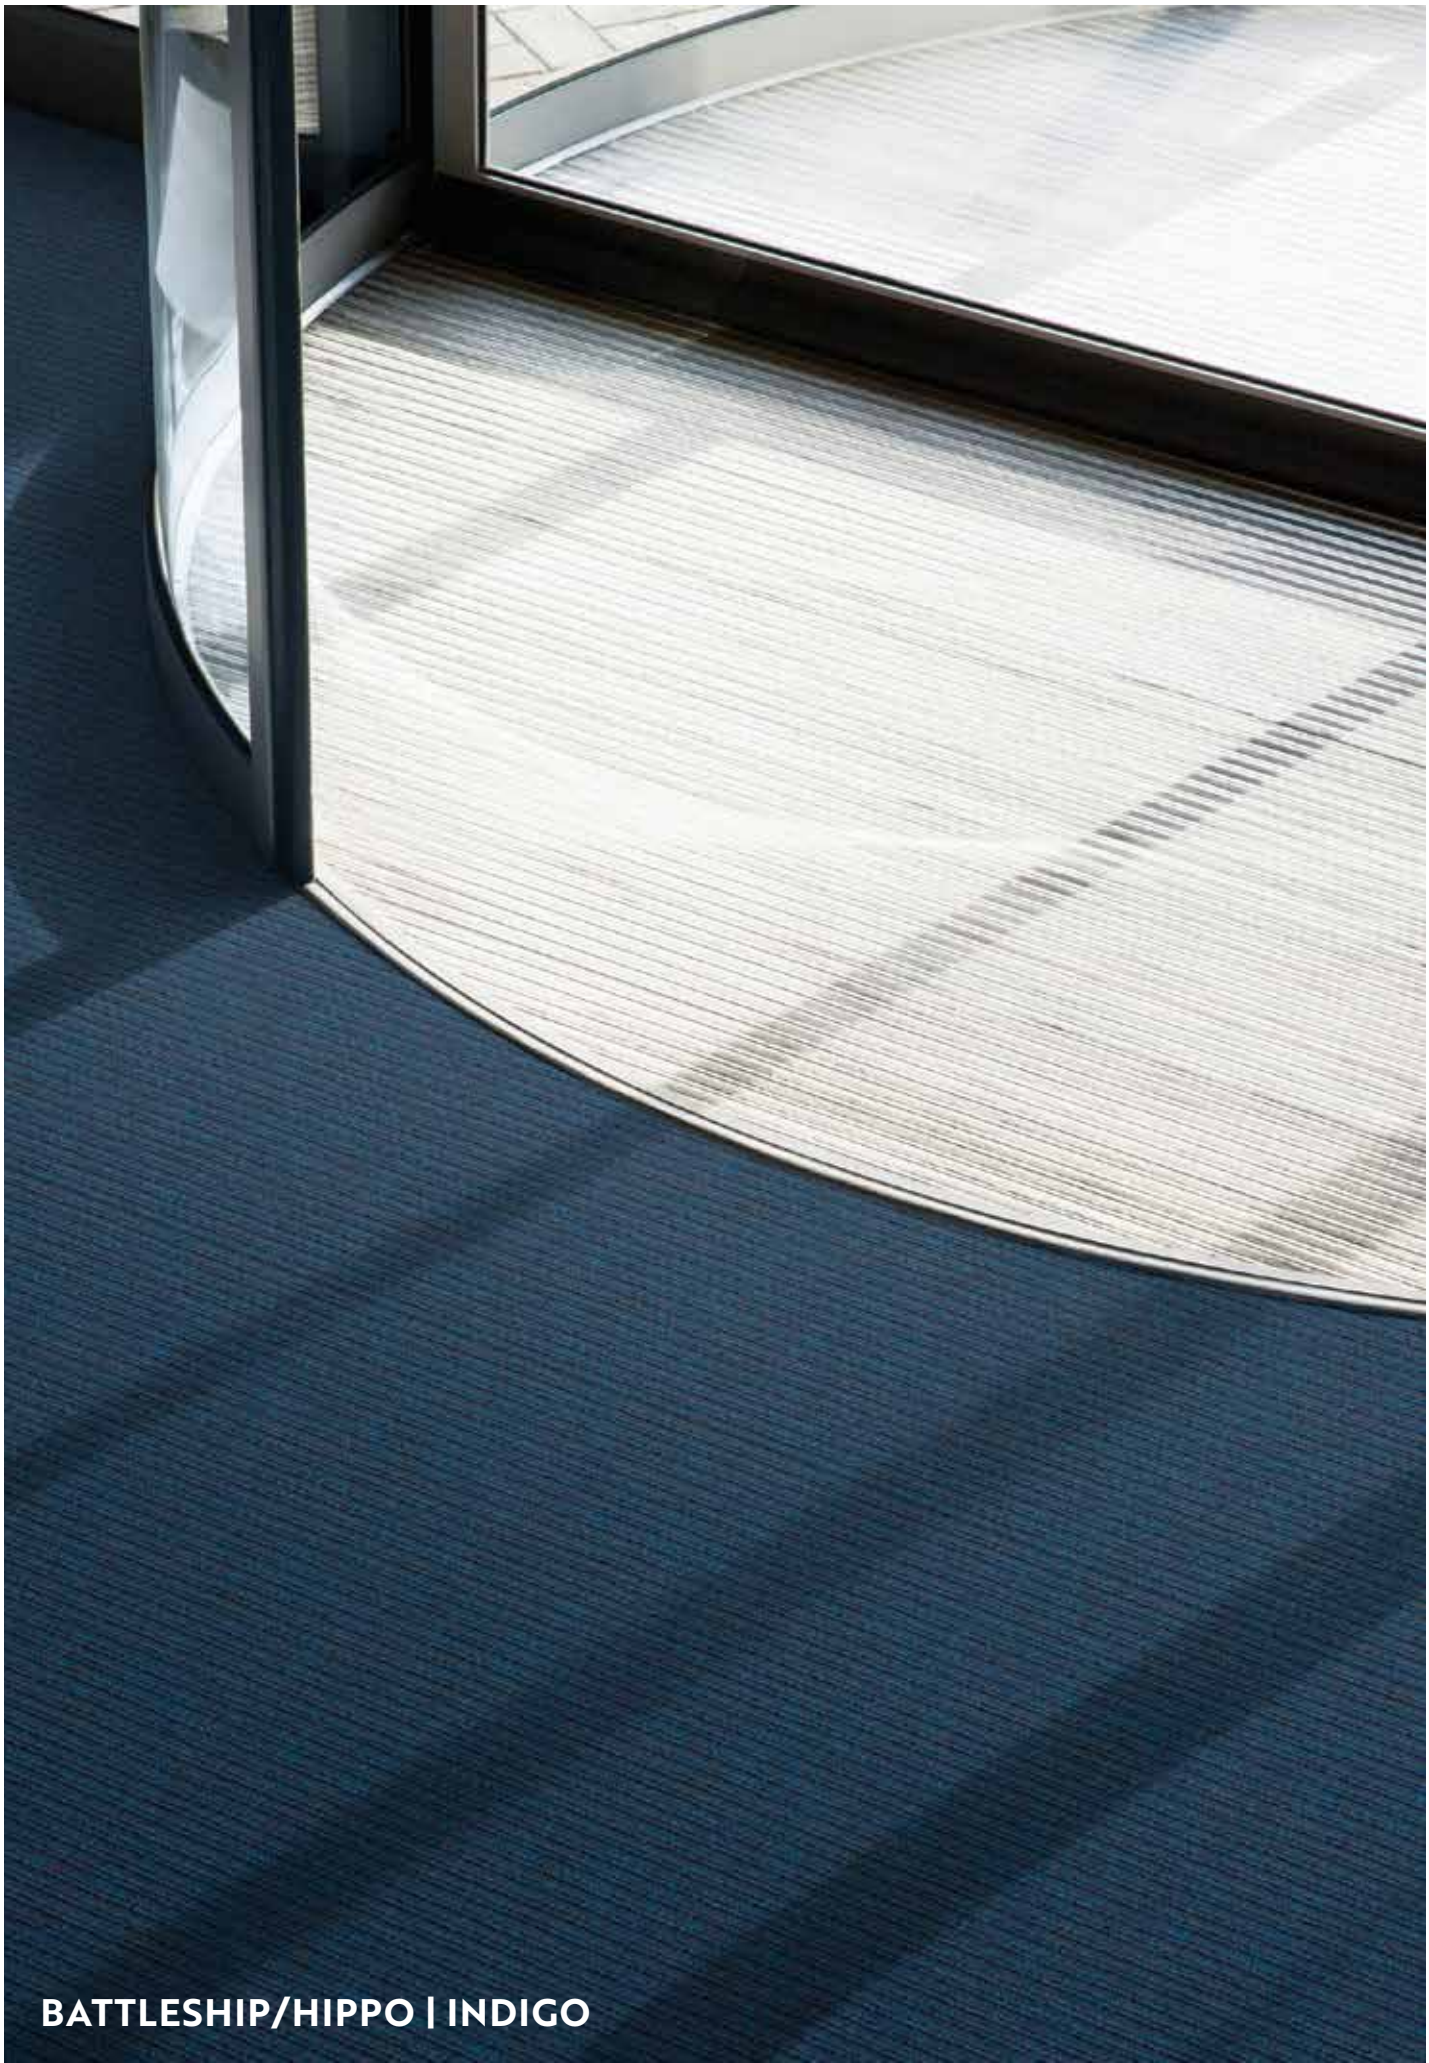

BATTLESHIP/HIPPO | INDIGO

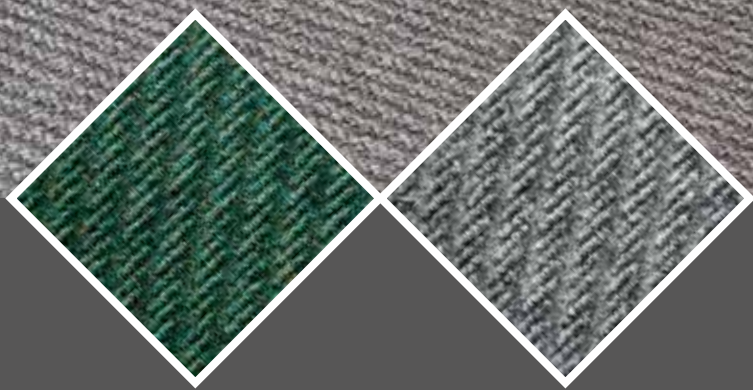

D

DREADNOUGHT

A prominent, heavy contract, diagonal-ribbed texture results in a highly durable surface, a popular choice for use in schools, colleges, universities and offices as well as entrance transition areas for apartment blocks.



ANTHRACITE

LRV 4.13



SLATE

LRV 5.57



ASH GREY

LRV 9.7



INDIGO

LRV 2.54



LINCOLN GREEN

LRV 3.52




FIESTA

LRV 4.13

Specification	Dreadnought		5 YEAR WEAR WARRANTY
Fibre Construction	90% Polypropylene, 10% Recycled Polyester		
Colour Fastness	Light (BS EN ISO 105:B02) 6 Wet Rubbing (BS EN ISO 105:BO1) 4-5 Dry Rubbing (BS EN ISO 105:X12) 4-5		
Flammability	(BS6307) Methenamine Pill Test - Pass BS EN 13501 - Class Efl (Sheet and Tile)		
Formats	Sheet ●	Tile ◆	
Backing	-	Bitumen	
Size	2 metre, ribbing runs diagonally down length of roll	50cm x 50cm	
Tiles Per Box	-	16 (4m²)	
Weight	1495gsm	3995gsm	
Thickness	11mm	11.5mm	



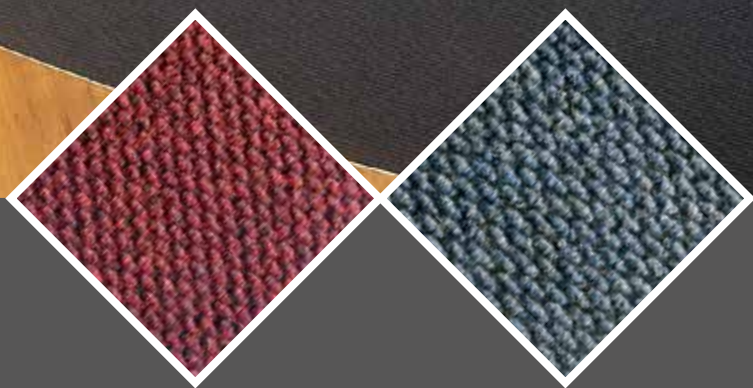

D

DIAMOND

A prominent, heavy contract, multi-directional texture results in a highly durable surface, a popular choice for use in schools, colleges, universities and offices as well as entrance transition areas for apartment blocks.

SHEET



GREEN



CHOCOLATE



RED




SCARLET



DOLPHIN BLUE



MOORLAND



BANK GREY



LAGOON

SHEET AND TILE



CHARCOAL



SILVER



INDIGO



CRYSTAL BLUE




EMERALD



BEIGE

Specification	Diamond		5 YEAR WEAR WARRANTY
Fibre Construction	85% Polypropylene, 15% Recycled Polyester		
Colour Fastness	Light (BS EN ISO 105:B02) >6 Wet Rubbing (BS EN ISO 105:BO1) 5 Dry Rubbing (BS EN ISO 105:X12) 5		
Flammability	(BS6307) Methenamine Pill Test - Pass BS EN 13501 - Class Efl (Sheet and Tile)		
Formats	Sheet ●	Tile ◆	
Backing	Rubber Crumb	Bitumen	
Size	2 metre	50cm x 50cm	
Tiles Per Box	-	16 (4m²)	
Weight	2500gsm	4400gsm	
Thickness	10.50mm	11mm	

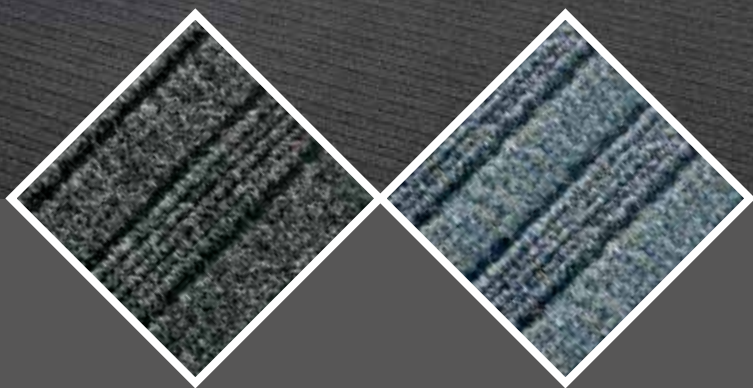

V

VANQUISHER

Vanquisher carpet is heavy contract and provides an alternative rib and velour surface pattern, specifically designed for use in entrance areas.


Available in four colours, Vanquisher carpet is used extensively in schools, colleges and universities, as well as retail, commercial environments and as entrance transition areas for apartment blocks.



CHARCOAL



ONYX

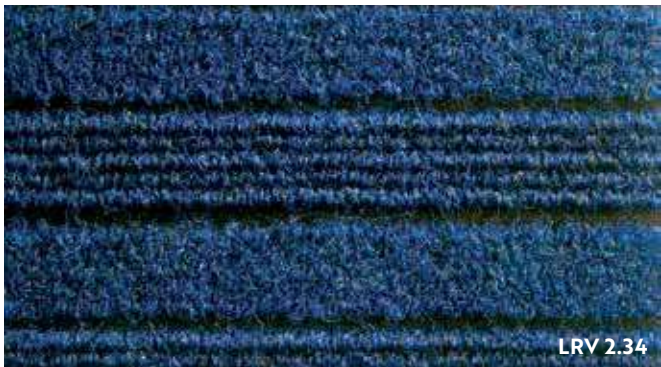

DEEP BLUE



KINGFISHER

Specification	Vanquisher	5 YEAR WEAR WARRANTY
Fibre Construction	100% Polypropylene	
Colour Fastness	Light (BS EN ISO 105:B02) 6 Wet Rubbing (BS EN ISO 105:BO1) 5 Dry Rubbing (BS EN ISO 105:X12) 5	
Flammability	(BS6307) Methenamine Pill Test - Pass BS EN 13501 - Class Efl	
Format	Sheet ●	
Size	2 metre, ribbing runs down length of roll	
Weight	1470gsm	
Thickness	11.50mm	





ZEPHYR

STICKS & STONES

Z

ZEPHYR


S

STICKS & STONES

Manufactured with a heavier weight fibre, heavy contract **Zephyr** is an enhanced hard-wearing carpet that can be installed in entrances, corridors and transition areas.


Heavy contract **Sticks & Stones** is a patterned hard-wearing carpet that can be installed in entrances, corridors and transition areas.

ZEPHYR

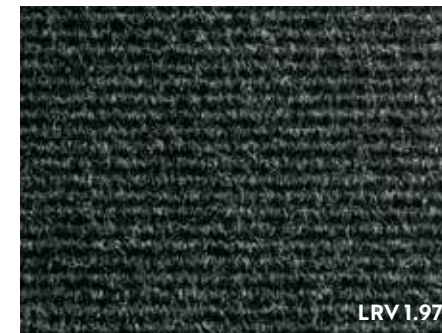

CHARCOAL

LRV 1.97

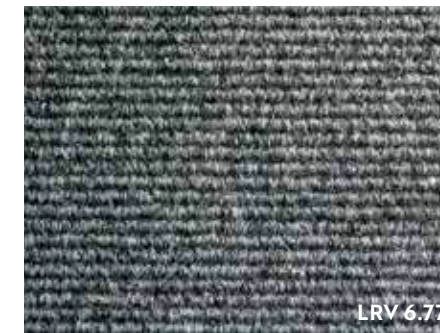

SILVER

LRV 6.77



INDIGO

LRV 3.01

STICKS & STONES



CHARCOAL

LRV 3.08

Specification	Zephyr		5 YEAR WEAR WARRANTY
Fibre Construction	85% Polypropylene, 15% Recycled Polyester		
Colour Fastness	Light (BS EN ISO 105:B02) >6 Wet Rubbing (BS EN ISO 105:BO1) 5 Dry Rubbing (BS EN ISO 105:X12) 5		
Flammability	(BS6307) Methenamine Pill Test - Pass BS EN 13501 - Class Efl (Sheet and Tile)		
Formats	Sheet ●	Tile ◆	
Backing	-	Bitumen	
Size	2 metre, ribbing runs down length of roll	50cm x 50cm	
Tiles Per Box	-	16 (4m ²)	
Weight	1900gsm	4400gsm	
Thickness	10mm	11mm	

Specification	Sticks & Stones	5 YEAR WEAR WARRANTY
Fibre Construction	85% Polypropylene, 15% Recycled Polyester	
Colour Fastness	Light (BS EN ISO 105:B02) 6 Wet Rubbing (BS EN ISO 105:BO1) 5 Dry Rubbing (BS EN ISO 105:X12) 5	
Flammability	(BS6307) Methenamine Pill Test - Pass BS EN 13501 - Class Efl	
Format	Tile ◆	
Backing	Bitumen	
Size	50cm x 50cm	
Tiles Per Box	16 (4m ²)	
Weight	4625gsm	
Thickness	13mm	

SPECIALIST CARPETS, TILES & MATS

- Bespoke Logo
- Wellington Loose Lay Classroom Mats
- Expo Tiles
- Fusion



BESPOKE LOGO



BESPOKE LOGO



BESPOKE LOGO



EXPO TILES



B

BESPOKE
LOGO

Make a lasting impression on clients, patrons or prospective students and create a bespoke carpet design or logo mat for your premises. Emblems, logos or slogans can be incorporated into a loose lay mat or inset into an entrance.



Specification	Bespoke Logo (Diamond)
Fibre Construction	85% Polypropylene, 15% Recycled Polyester
Colour Fastness	Light (BS EN ISO 105:B02) >6 Wet Rubbing (BS EN ISO 105:B01) 5 Dry Rubbing (BS EN ISO 105:X12) 5
Flammability	(BS6307) Methenamine Pill Test - Pass BS EN 13501 - Class Efl
Size	Bespoke, contact Heckmondwike
Weight	2550gsm
Thickness	10.50mm



W

WELLINGTON LOOSE LAY CLASSROOM MATS


The **Wellington Loose Lay Classroom Mat** range is ideal for education establishments. In classroom settings the rubber edged mat can be used as a quiet and comfortable reading area, communal play zone or demarcated activities area.

E

EXPO TILES

Our versatile **Expo Tiles** allow you to transform a school hall, community centre or school sports hall into a fully-carpeted venue.

WELLINGTON LOOSE LAY CLASSROOM MATS



ANTHRACITE




CLARET



SAPPHIRE




LINCOLN GREEN




MOONSTONE

EXPO TILES



DRAGOON PETROL BLUE



DRAGOON ANTHRACITE




DRAGOON CHARCOAL

Specification	Wellington Loose Lay Classroom Mats
Fibre Construction	90% Polypropylene, 10% Recycled Polyester
Colour Fastness	Light (BS EN ISO 105:B02) >6 Wet Rubbing (BS EN ISO 105:BO1) 5 Dry Rubbing (BS EN ISO 105:X12) 5
Flammability	(BS5287) Assessment and labelling of Textile Floorcoverings tested to BS4790 (Hot Metal Nut Test) - Low Radius of Char
Impact Noise Reduction	BS EN ISO 140-8: 24dB (Sheet)
Format	Sheet material supplied as a mat
Backing	Rubber Waffle - also fitted with rubber safety edging
Size	Bespoke (maximum size available 4m x 4m)
Weight	1880gsm
Thickness	11mm

Please allow for 4cm on each side of the mat for ramped rubber edging.

Specification	Expo Tiles
Fibre Construction	90% Polypropylene, 10% Recycled Polyester
Flammability	(BS6307) Methenamine Pill Test - Pass BS EN 13501 - Class Efl
Backing	PVC
Size	2m x 1m
Weight	3625gsm
Thickness	7mm

Installation does not require adhesive or a professional flooring contractor. Tiles should be stored flat for optimum performance.

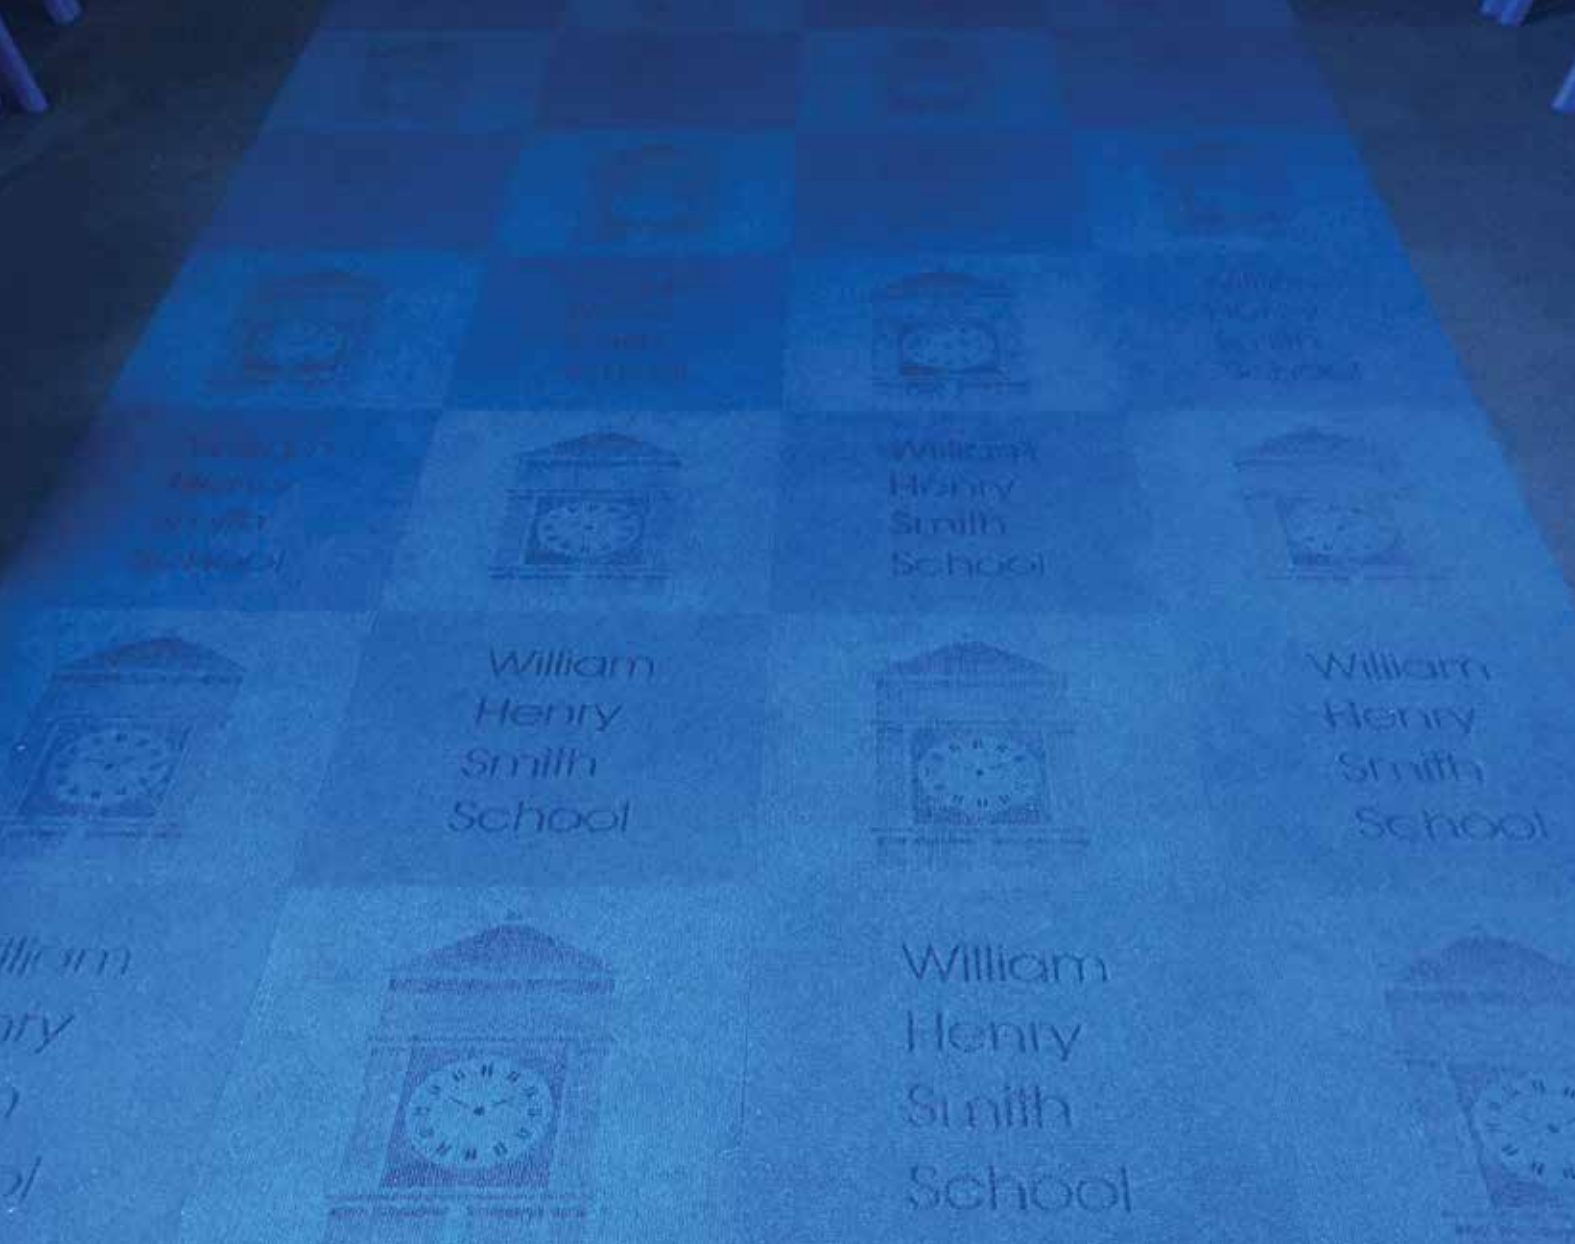

F

FUSION

Fusion is the revolutionary new logo and way-finding tile. Use Fusion to brand your logo into a carpet tile or show direction by advising classroom numbers or room locations without additional signage.




Colourways

Available in 4 products across over 50 colourways



SUPACORD

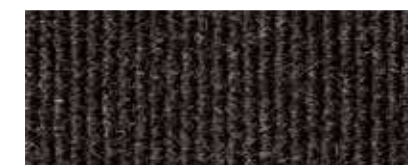

BROADRIB



HOBNAIL



ARRAY



SECTOR EXPERTISE

- EDUCATION
- APARTMENTS
- ARCHITECTURE AND DEVELOPMENT






EDUCATION





APARTMENT COMMUNAL AREAS

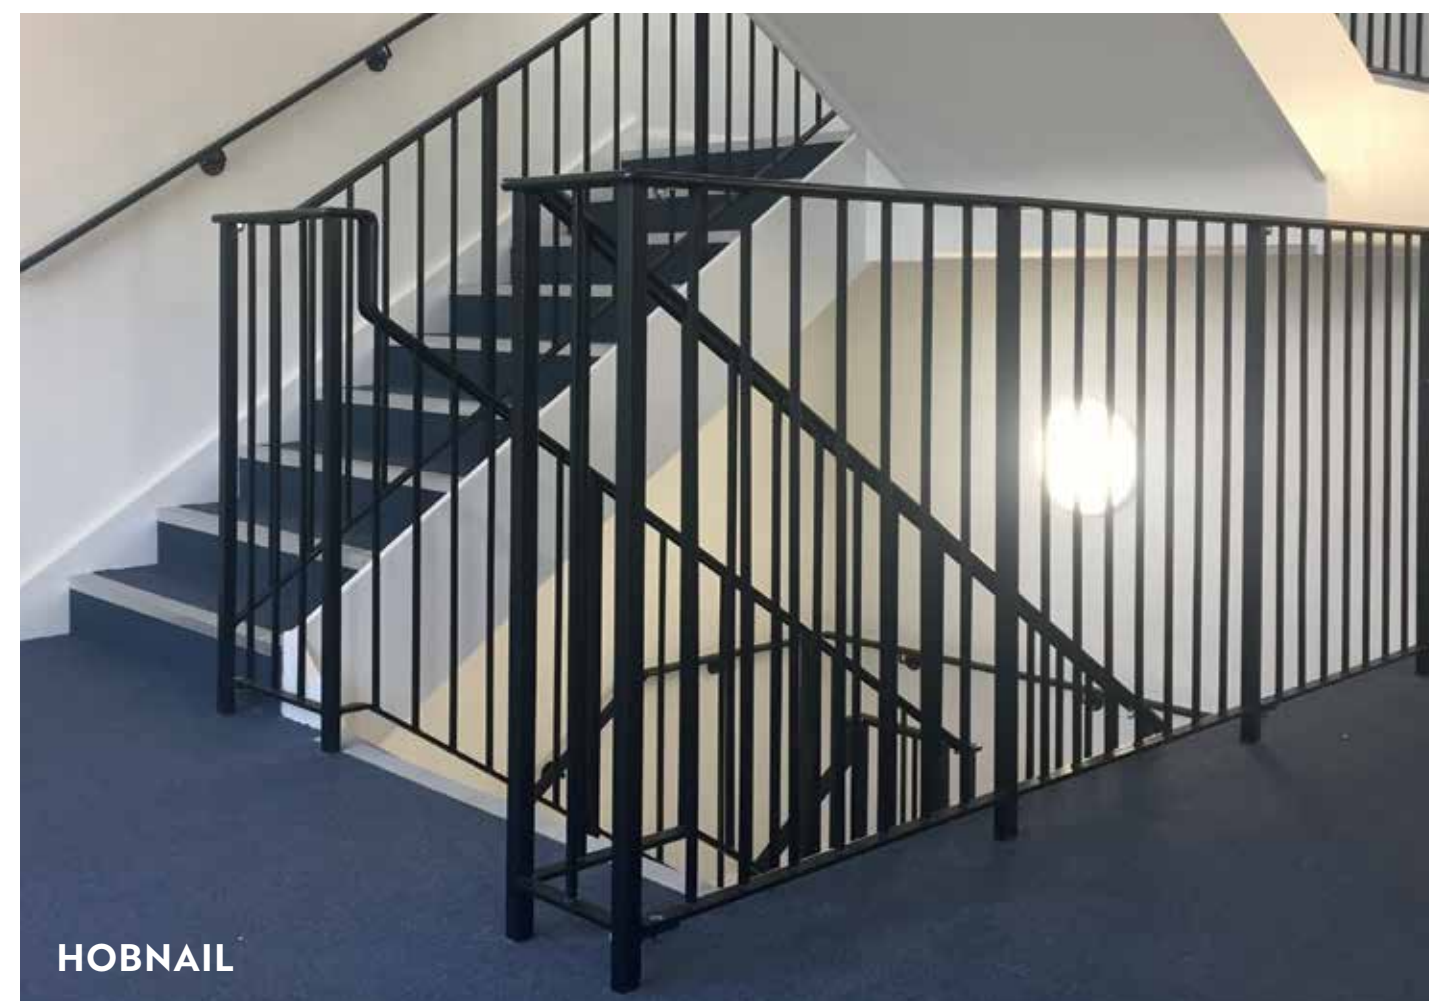



ARRAY AND BROADRIB



ARRAY AND BROADRIB

ARCHITECTURE & DEVELOPMENT

Looking to brush up on your knowledge of carpets and floor finishes?

We have developed a RIBA-accredited CPD that is perfect for the A&D industry, titled 'specifying fibre bonded carpets in the contract environment'.

Over the one hour 'lunch and learn' seminar, participants will learn:

- Factors to consider when specifying contract flooring
- Differences between sheet, carpet tiles and planks
- Manufacturing processes
- How fibre-bonded carpets meet legislation

Contact your local sales manager for further details.



SUPACORD



Heckmondwike are here to support all your project needs, from concept to completion.

Offering assistance on everything from colour, design and installation, to cleaning and maintenance, our UK based technical and sales teams are on hand to provide advice and in-depth knowledge otherwise unrivalled in the fibre bonded carpet industry.

In addition to our dedicated technical team, who are delighted to answer and support you with any queries you may have, you can find a comprehensive range of technical guides and resources for our range of products, on our website.

Our dedicated online 'Download Centre' includes resources for the following:

- Product specifications
- NBS specifications
- NBS source & BIM models
- Light reflectance values
- Declarations performance
- Installation
- Quality management
- Cleaning and maintenance

Visit www.heckmondwike-fb.co.uk or contact our technical team who will be happy to assist you with any query, at technical@heckmondwike-fb.co.uk





Our factory location in the heart of Yorkshire is a daily reminder of the need to protect and preserve the environment. It's why we make sure everything we do and everything we use in the manufacture of our carpets has as little impact as possible on the world around us. We keep a close eye on our activities and objectives to check we're staying true to our principles, when we see an opportunity to make improvements, that's exactly what we do.

At Heckmondwike, we..

- Ensure environmental issues are considered in all key business decisions.
- Achieve a high and sustained level of staff environmental awareness and encourage environmentally responsible practices throughout the organisation.
- Regularly set and monitor the achievement of environmental objectives to promote continuous improvement.
- Assess environmental aspects and impacts prior to starting any new activity, project or building new facilities.
- Encourage waste minimisation and recycling throughout the company and during the life cycle of our products.
- Minimise the adverse environmental impacts of waste generation and promote the safe and responsible disposal of waste.
- Develop a proactive approach to encourage good environmental practices by all our contractors and suppliers.
- Communicate with all interested parties, by providing up to date information on environmental issues relevant to the business.
- Minimise the risk of pollution using controlled methods of containing, reporting and cleaning up in the unlikely event of an accident.

OUR ENVIRONMENTAL POLICIES

Manufacturing:

The Heckmondwike factory is fully accredited to BS EN ISO 14001:2015 and appropriate industry codes of practice for sustainability, alongside existing quality, health, safety and business management systems.

Regeneration:

We actively encourage waste reduction, re-use and recycling in all our manufacturing activities and through the life cycle of our products. The result is a reduction in waste and the consumption of raw materials.

Responsibility:

Any waste which arises from our manufacturing process is managed and disposed of responsibly in line with regulations and best practice. For a full copy of our environment policy, please visit our website: www.heckmondwike-fb.co.uk

Certification:

Certification of Environmental Profiles:

Following individual assessment, Supacord has been awarded a BRE A+ certification for use in schools and offices. For a full list of all products tested and the results, please visit: www.greenbooklive.com

Environmental Management System:

Heckmondwike FB is BS EN ISO 14001:2015 certified, reflecting our commitment to minimise our company's impact on the environment.

For our full environmental policy handbook visit our website: www.heckmondwike-fb.co.uk



SALES

Tel: 01924 406161

Fax: 0800 136769

Email: sales@heckmondwike-fb.co.uk

TECHNICAL

Tel: 01924 413634

Fax: 0800 136769

Email: technical@heckmondwike-fb.co.uk

SAMPLES

Tel: 01924 413637

Fax: 0800 136769

Email: samples@heckmondwike-fb.co.uk

