

DEALER CERTIFICATE

This is to certify that the company AAA INTERNATIONAL (Proprietor: Gopal Jha)

Noida, Gautam, Buddha Nagar, 201301, India

is an authorised distributor of Paragon Carpet Tiles and is entitled to promote, sell and install these products in India until further notice.

Mr. Adrian WAKE

Export Sales Manager

Heckmondwike FB | Paragon Carpet Tiles | Mat.Works

(Divisions of National Floorcoverings Ltd.)

T: +44 (0)7768 164165

W: www.nfcltd.uk | www.heckmondwike-fb.co.uk | www.paragon-carpets.co.uk |

www.paragon-carpets.co.uk/matworks

Date of issue: 1st January 2022



EXPERIENCE CARPET TILES







PARAGON CARPET TILES

Paragon Carpet Tiles is part of National Floorcoverings, a group that is committed to UK manufacturing and producing quality products for its customers.

The Group has expertise in all areas of flooring, from manufacturing entrance matting, fibre bonded carpets, tufted carpet and tiles to specialised indoor and outdoor sports surfaces.

CONTENTS

DESIGN LOOP

| Inspiration - Cresta | 6 |
|----------------------|----|
| Inspiration - Mesh | |
| Inspiration - Greda | |
| Inspiration - Phase | 18 |
| Vapour | 22 |
| Total Contrast | 26 |
| Strobe | 28 |
| Workspace Linear | 30 |
| Codec | 32 |
| | |

LOOP PILE

| Workspace Loop | 36 |
|--------------------------------|----|
| Evolve | 38 |
| Diversity and Diversity Groove | |
| Vital | 44 |
| Toccarre | 46 |
| Sirocco and Sirocco Stripe | 48 |
| Macaw and Macaw Stripe | 52 |

CUT PILE

| Maestro | 58 |
|--------------------|----|
| Workspace Cut Pile | 60 |

LUXURY COMMERCIAL VINYL

Rappórt 64 Duera 66

ENTRANCE MATTING

PRIMARY:

| Frameworks | |
|--------------------|----|
| Treadloc 25 | |
| Entrack 50 | 76 |
| SECONDARY: | |
| Workspace Entrance | 80 |
| | |


EXPLORE PARAGON CARPET TILES

| National Floorcoverings | 83 |
|--------------------------------|----|
| Environment and Manufacturing | 84 |
| Cleaning and Maintenance Guide | 90 |
| Contact Details | 92 |



DESIGN LOOP

| Inspiration - Cresta | 6 |
|----------------------|----|
| Inspiration - Mesh | 10 |
| Inspiration - Greda | 14 |
| Inspiration - Phase | 18 |
| Vapour | 22 |
| Total Contrast | 26 |
| Strobe | 28 |
| Workspace Linear | 30 |
| Codec | 32 |

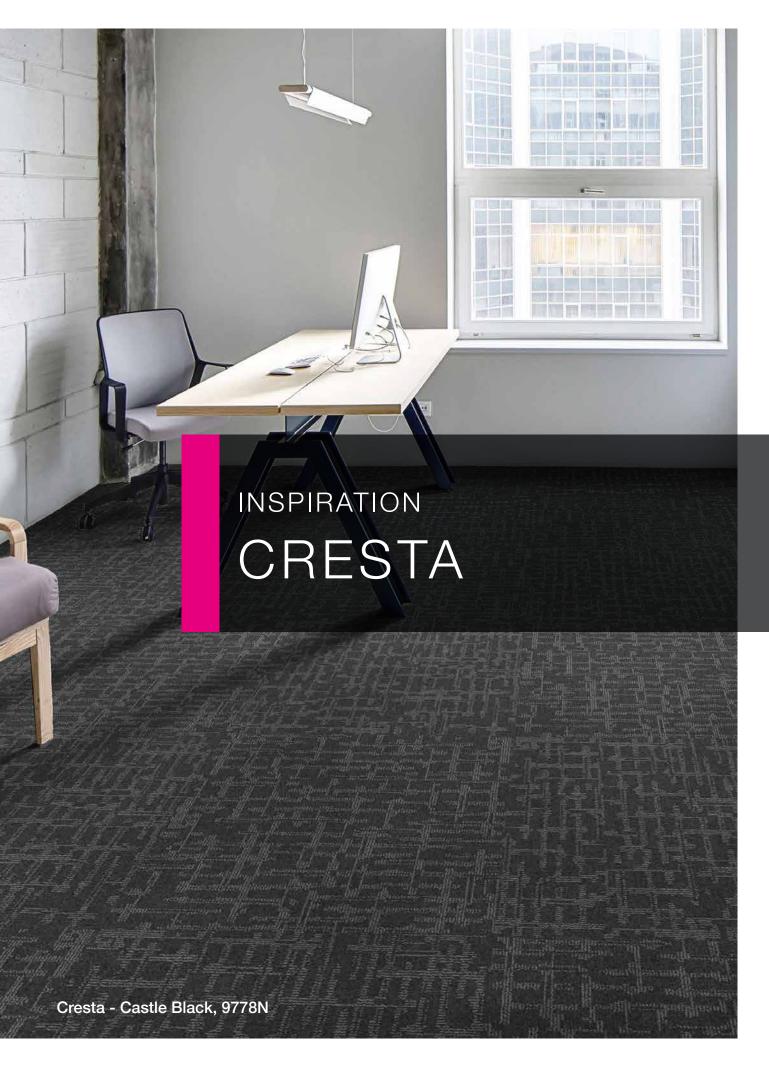



Castle Black, 9778N (LRV - 1.91)



Silver Wolf, 8779N (LRV - 3.94)



Polar Trek, 1790N (LRV - 18.94)



Glam Cyan, 6755N (LRV - 3.60)



Bear Silver, 9749N (LRV - 4.15)



Lucent Grey, 1746N (LRV - 7.63)

Pile Yarn Weight 750gsm Pile Height 3mm - 5mm **Total Weight** 4450gsm **Total Thickness** $7mm \pm 0.5mm$

100% Envirobase - minimum Backing of 75% recycled material **Additional Backing** Komfort Bac available on request

Tile Size 50cm x 50cm Tiles Per Box 20 (5m²)

Wear Classification Heavy Contract Class 33

Luxury Class

Colour Fastness

Anti-static Suitable for use with computers.

Less than 2Kv

Light (BS EN ISO 105:B02) >5

Shampoo (BS 1006:UK-TB:1990) >4

Dry Rubbing (BS EN ISO 105:B01) >4 Wet Rubbing (BS EN ISO 105:X12) >4

Flammability BS5287 Assessment and labelling


of Textile Floorcovering tested to BS4790 (Hot Metal Nut Test) -Low Radius of Char


BS EN 13501 Class Bfl-s1 **Impact Noise Reduction** 23dB

Suitable for intensive use with **Castor Chair Test**

castor chairs


Warranty 10 years



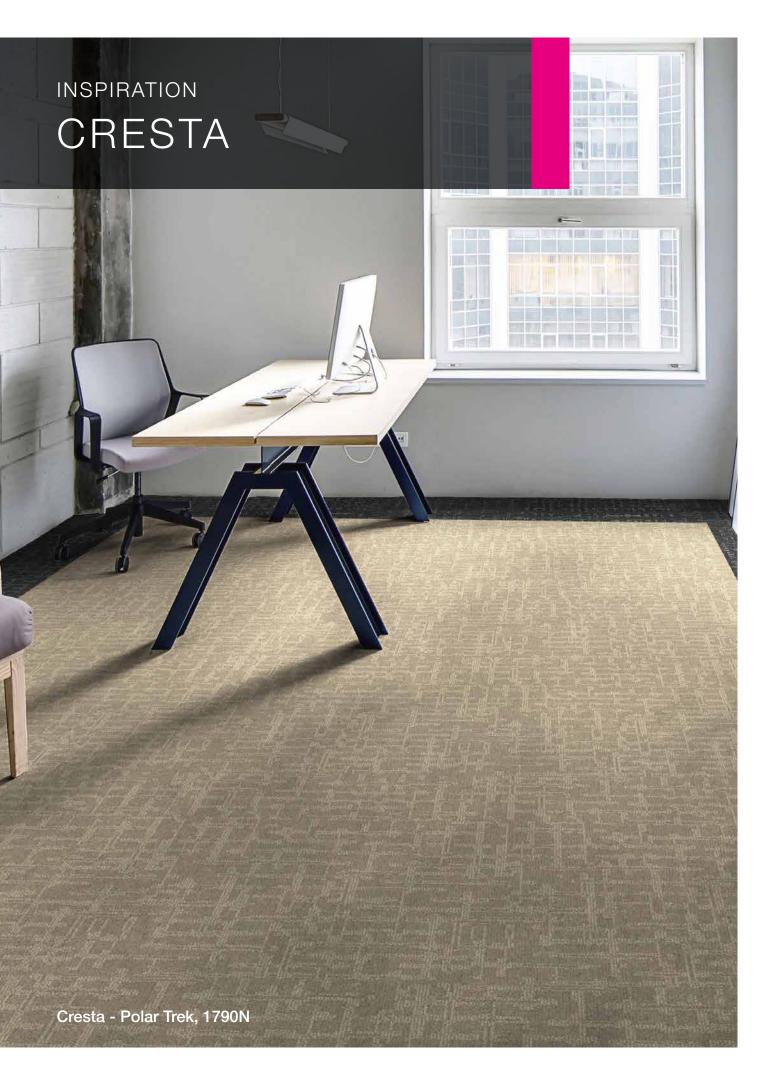







Obsidian Flash, 8775L (LRV - 5.10)



Sonic Coal, 8773L (LRV - 12.69)



Shadow Bone, 8778L



Mild Sienna, 6755L (LRV - 2.04)



Satin Ash, 9748L (LRV - 4.20)



Burly Wood, 1745L (LRV - 8.43)

Pile Yarn Weight 750gsm Pile Height 2.5mm - 5.5mm **Total Weight** 4450gsm **Total Thickness** $7mm \pm 0.5mm$ 100% Envirobase - minimum Backing

of 75% recycled material **Additional Backing** Komfort Bac available on request

Tile Size 50cm x 50cm Tiles Per Box 20 (5m²)

Wear Classification Heavy Contract Class 33

Luxury Class

Colour Fastness

Anti-static Suitable for use with computers.

Less than 2Kv

Shampoo (BS 1006:UK-TB:1990) >4 Dry Rubbing (BS EN ISO 105:B01) >4

Wet Rubbing (BS EN ISO 105:X12) >4 Flammability

BS5287 Assessment and labelling of Textile Floorcovering tested to BS4790 (Hot Metal Nut Test) -Low Radius of Char


Light (BS EN ISO 105:B02) >5


BS EN 13501 Class Bfl-s1 **Impact Noise Reduction** 23dB

Suitable for continuous use with **Castor Chair Test**


castor chairs

Warranty 10 years



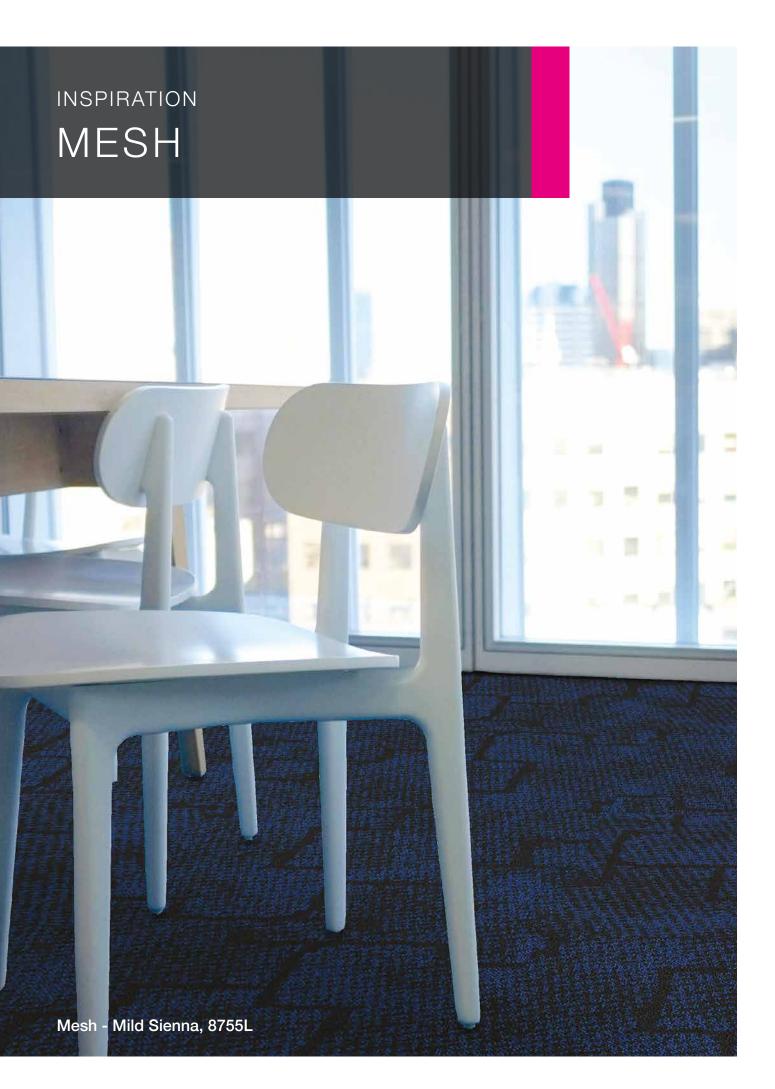



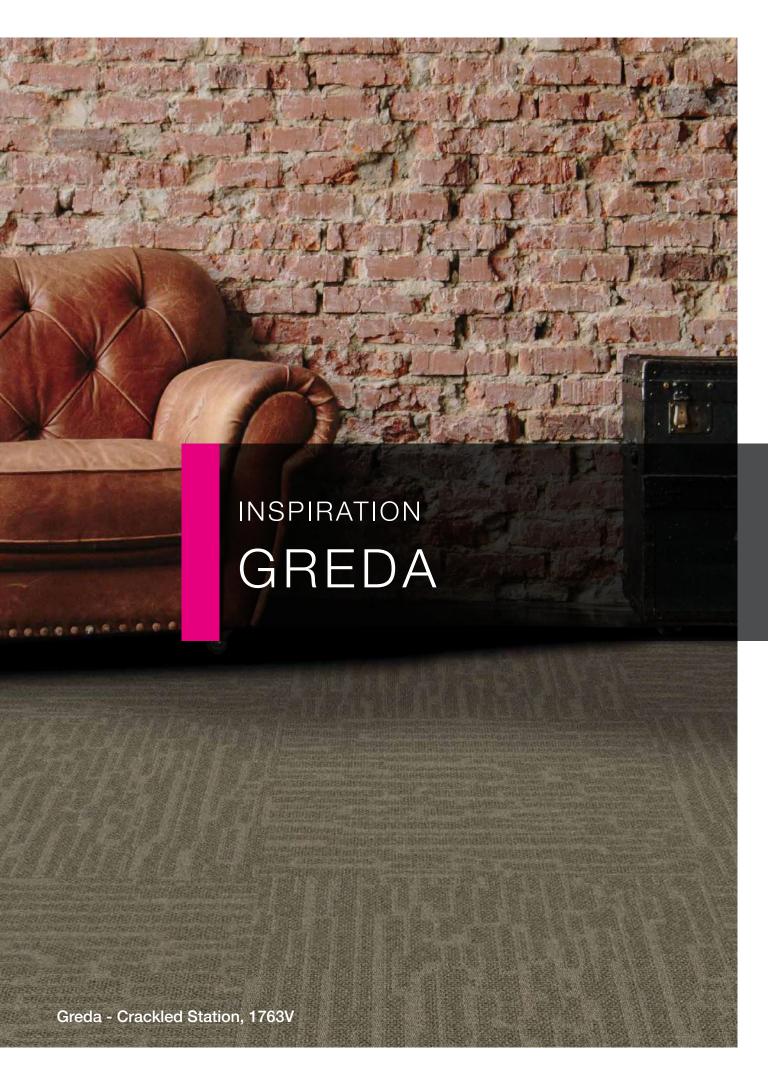



Livid Grey, 8773V (LRV - 10.40)



Ghost Machine, 8775V (LRV - 4.19)



Crackled Station, 1763V (LRV - 12.20)



Moccasin, 3730V (LRV - 10.37)



Electric Azure, 6755V (LRV - 3.77)



Lime Spring, 5761V (LRV - 24.37)

Pile Yarn Weight 750gsm Pile Height 3mm - 6.5mm **Total Weight** 4450gsm **Total Thickness** 8mm ± 0.5mm Backing

100% Envirobase - minimum of 75% recycled material Additional Backing Komfort Bac available on request

Tile Size 50cm x 50cm Tiles Per Box 20 (5m²)

Wear Classification Heavy Contract Class 33

Luxury Class

Colour Fastness

BS EN 13501

Anti-static Suitable for use with computers.

Less than 2Kv

Light (BS EN ISO 105:B02) >5 Shampoo (BS 1006:UK-TB:1990) >4

Dry Rubbing (BS EN ISO 105:B01) >4 Wet Rubbing (BS EN ISO 105:X12) >4

Flammability BS5287 Assessment and labelling

of Textile Floorcovering tested to BS4790 (Hot Metal Nut Test) -Low Radius of Char


Class Bfl-s1


Impact Noise Reduction


Castor Chair Test Suitable for intensive use with

Warranty 10 years



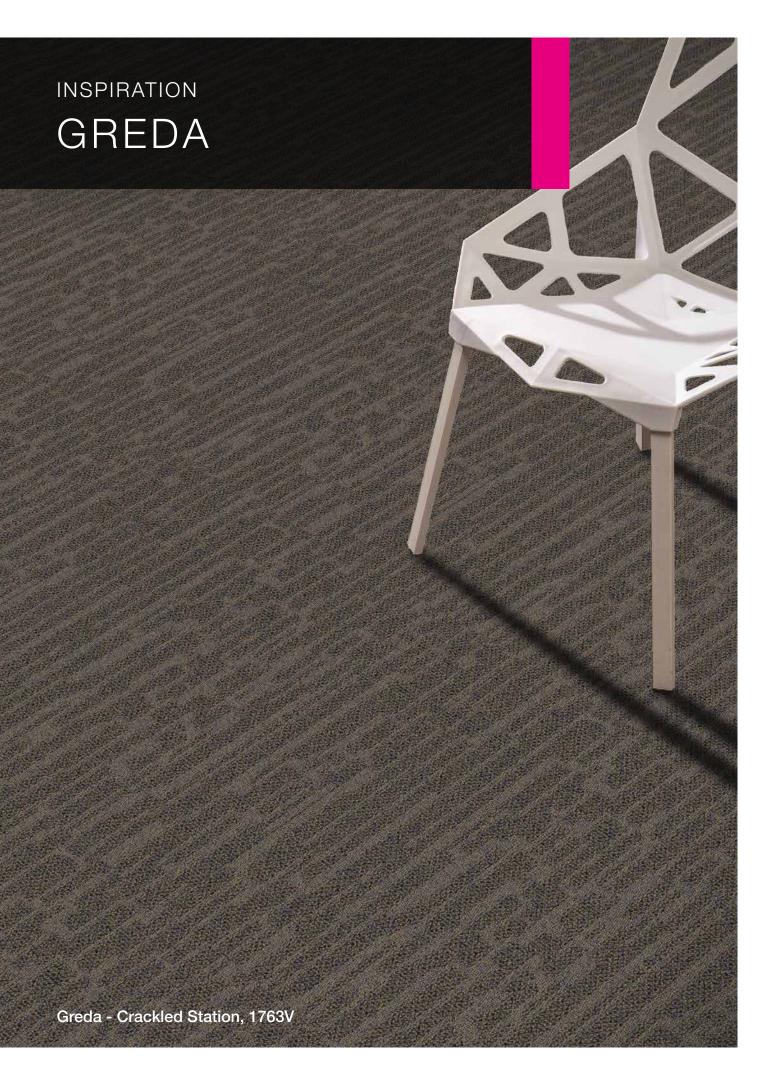

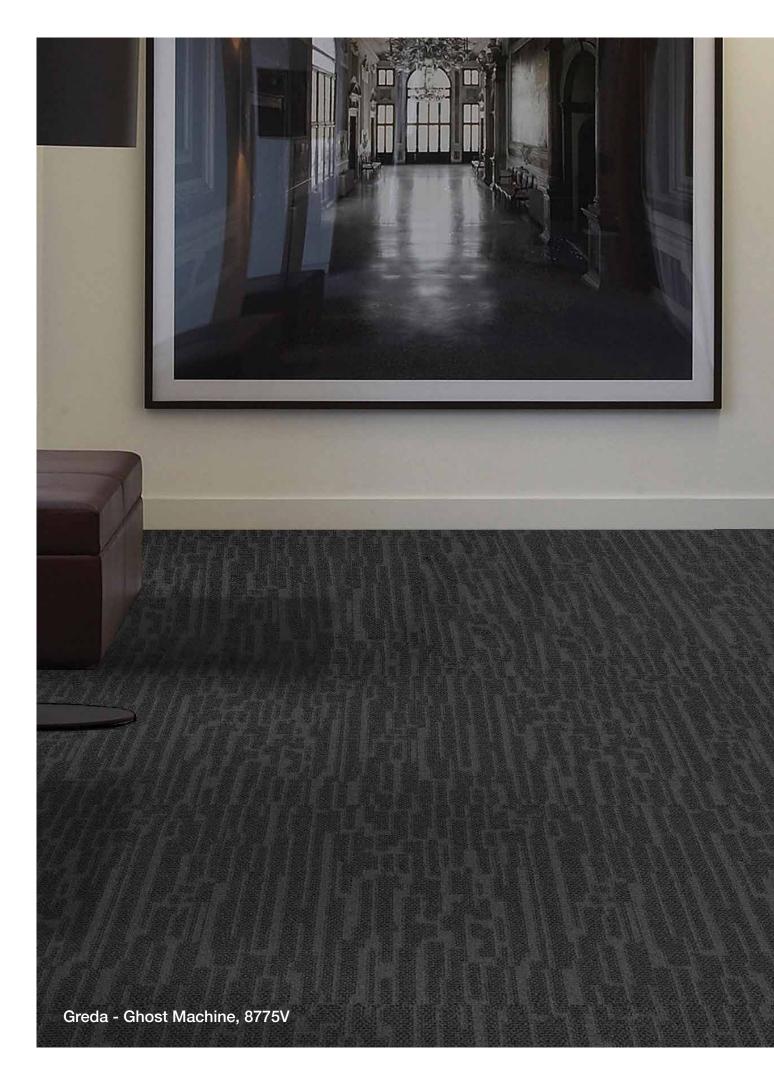

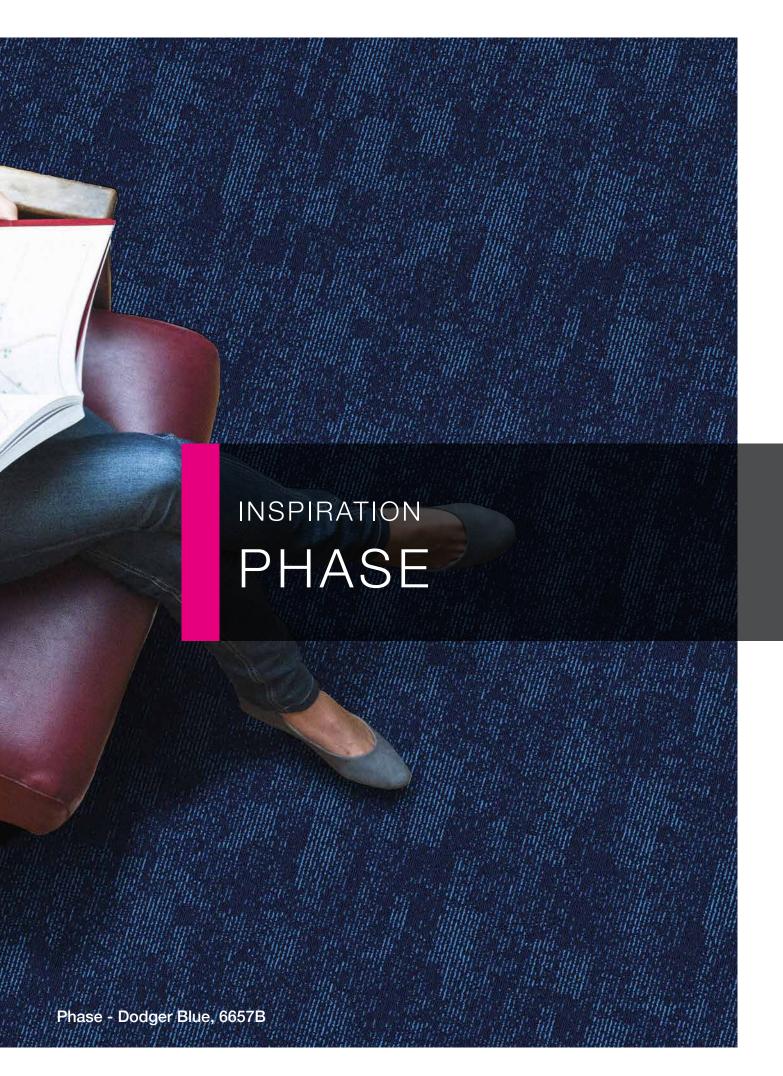



Gainsboro, 8675B (LRV - 6.13)



Virtual Ebony, 8677B (LRV - 2.87)



Charged Metal, 1648B (LRV - 2.69)



Dodger Blue, 6657B (LRV - 2.78)



Cloud Indigo, 6658B (LRV - 5.07)



Navajo Brown, 3627B (LRV - 3.24)

Pile Yarn Weight 610gsm Pile Height 2.5mm - 5.5mm **Total Weight** 4310gsm **Total Thickness** $7mm \pm 0.5mm$ 100% Envirobase - minimum Backing

of 75% recycled material **Additional Backing** Komfort Bac available on request

Tile Size 50cm x 50cm Tiles Per Box 20 (5m²)

Wear Classification Heavy Contract Class 33

Luxury Class

Colour Fastness

Anti-static Suitable for use with computers.

Less than 2Kv

Light (BS EN ISO 105:B02) >5 Shampoo (BS 1006:UK-TB:1990) >4

Dry Rubbing (BS EN ISO 105:B01) >4 Wet Rubbing (BS EN ISO 105:X12) >4

Flammability BS5287 Assessment and labelling

of Textile Floorcovering tested to BS4790 (Hot Metal Nut Test) -Low Radius of Char


BS EN 13501 Class Bfl-s1

Impact Noise Reduction 23dB


Castor Chair Test Suitable for intensive use with


castor chairs

10 years Warranty





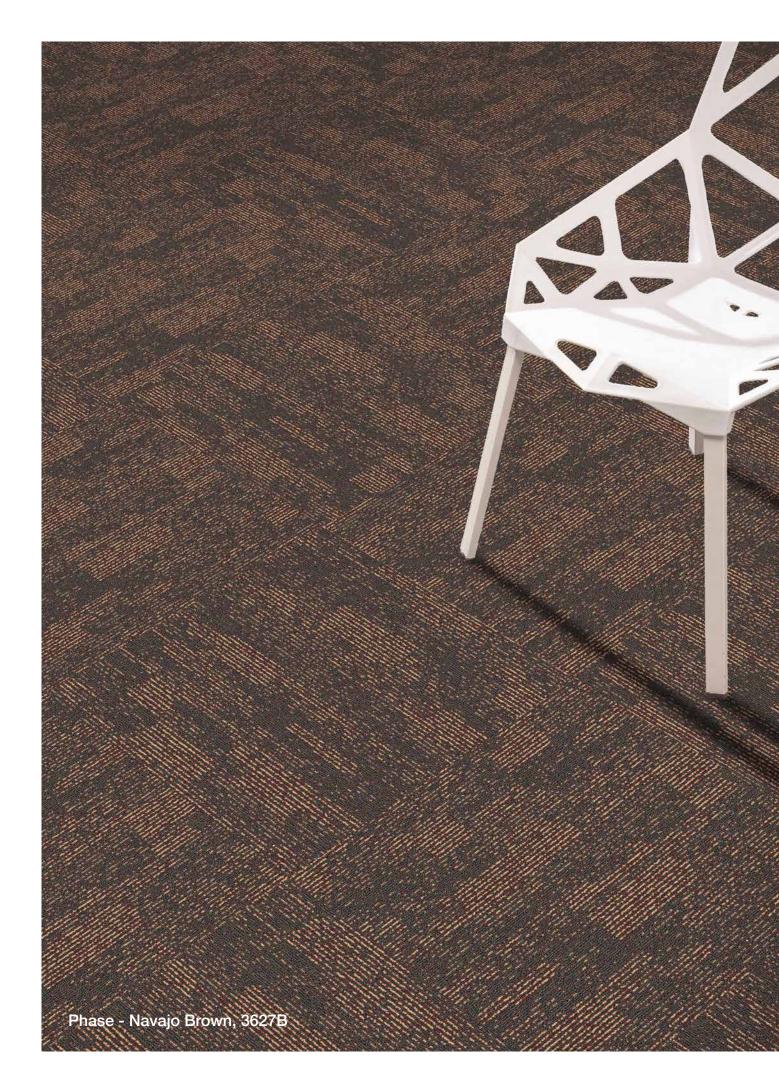

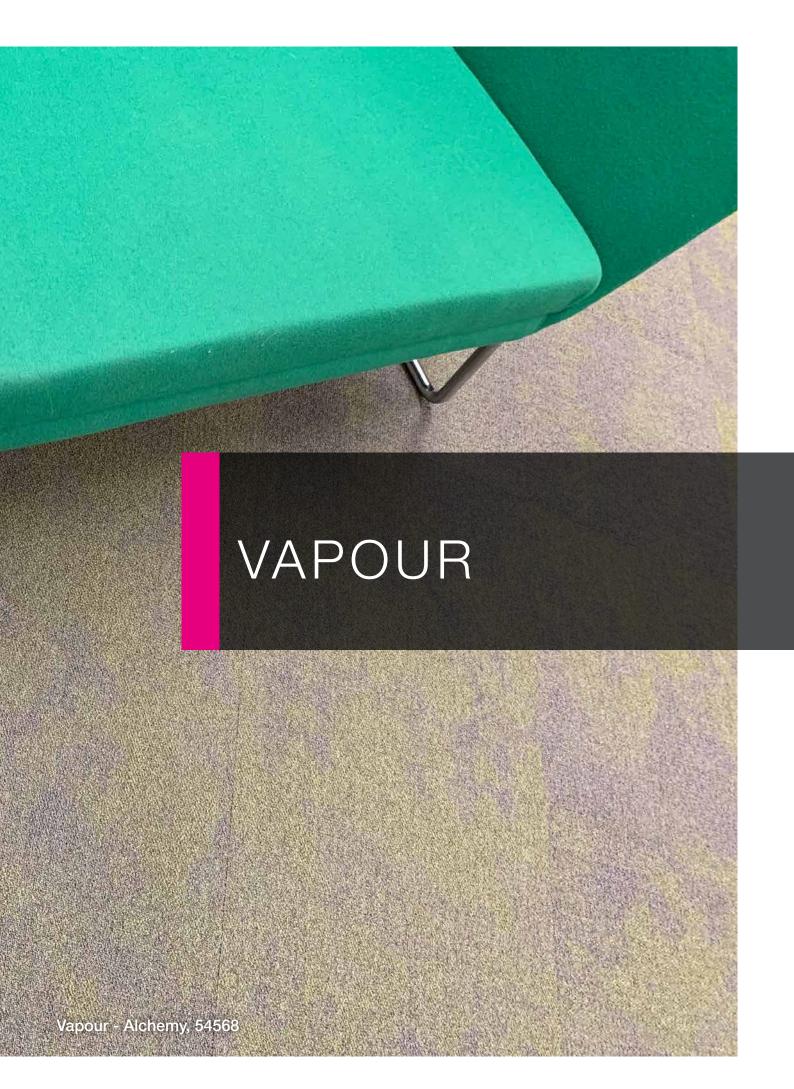



Thermos, 82146 (LRV - 3.70)



Alchemy, 54568 (LRV - 10.74)



Wisp, 81434 (LRV - 5.94)



Distill, 84559 (LRV - 15.04)



Neboa, 74559 (LRV - 5.94)



Nitro, 63846 (LRV - 4.45)



Electron, 63888 (LRV - 7.55)



Haze, 63244 (LRV - 4.48)



Purify, 81111 (LRV - 7.52)



Brume, 18382 (LRV - 13.13)

Pile Yarn Weight 650gsm Pile Height 2.5mm ± 0.5mm **Total Weight** 3800gsm **Total Thickness** 6mm ± 0.5mm

100% Envirobase - minimum Backing of 75% recycled material

Tile Size 50cm x 50cm Tiles Per Box 20 (5m²)

Wear Classification Heavy Contract Class 33

Luxury Class

Anti-static Suitable for use with computers.

Light (BS EN ISO 105:B02) >6 Shampoo (BS 1006:UK-TB:1990) 4-5 **Colour Fastness**

Dry Rubbing (BS EN ISO 105:B01) 4-5 Wet Rubbing (BS EN ISO 105:X12) 4-5

Flammability

BS5287 Assessment and labelling of Textile Floorcovering tested to BS4790 (Hot Metal Nut Test) - Low Radius of Char

BS EN 13501 Class Bfl-s1 25dB Impact Noise Reduction


Suitable for intensive use with **Castor Chair Test**


castor chairs

10 years Warrantv

VOC Content E1 in relation to EN 14041:2004


Environmental Status BREEAM® A Rated



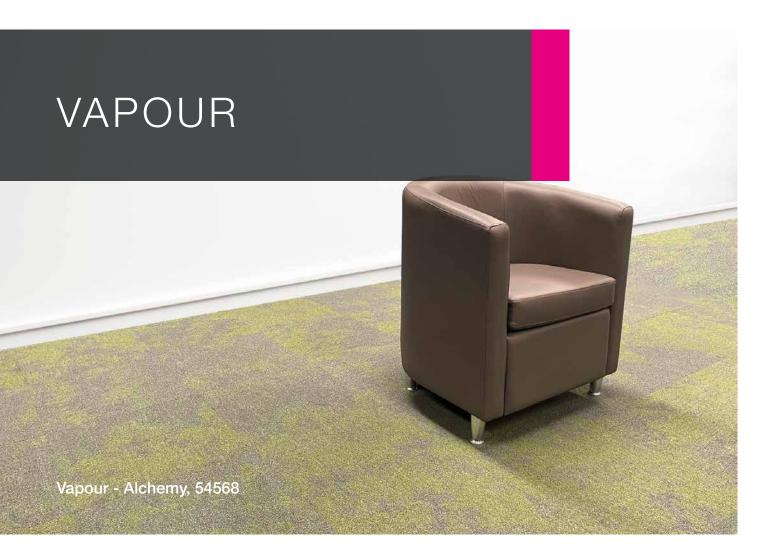





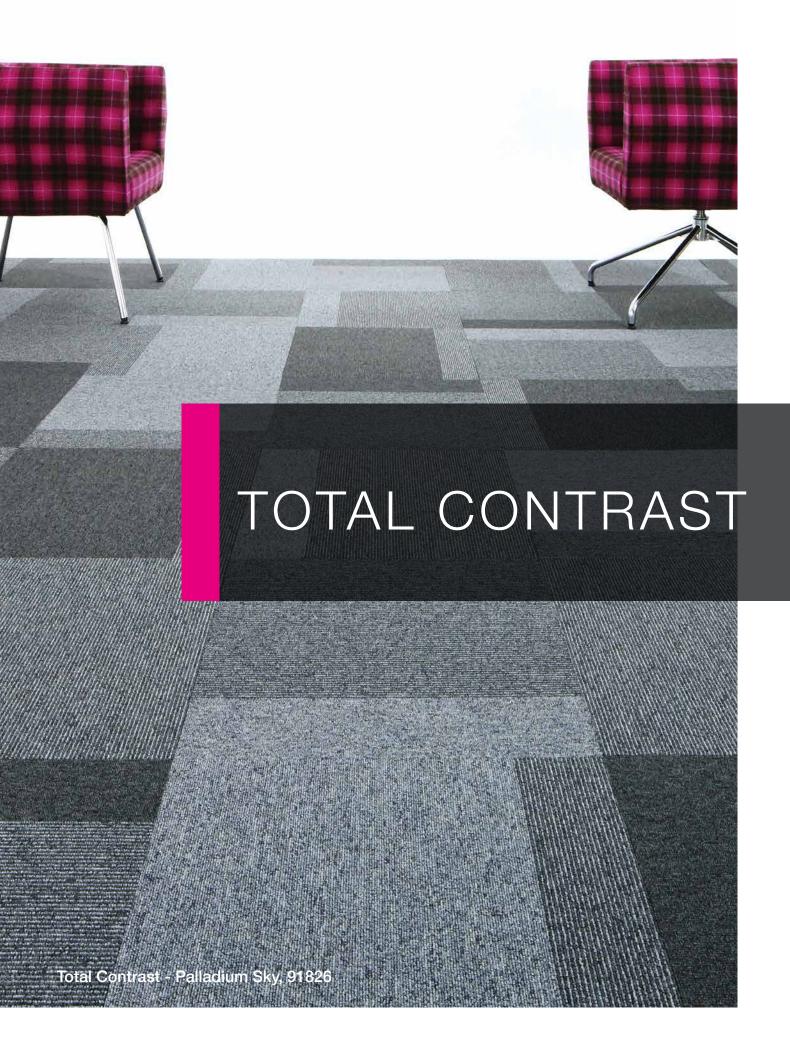



Palladium Sky, 91826 (LRV - 3.74)



Chrome Pelt, 83126 (LRV - 8.51)



Ocean Rocks, 64518 (LRV - 3.01)



Black Leaf, 52926 (LRV - 11.81)



Cracked Sapling, 10001 (LRV - 14.99)



Mellow Bark, 10203 (LRV - 11.69)

Colourways show 1sqm for pattern effect

manufactured from recycled

fishing nets

Pile Yarn Weight600gsmPile Height3mmTotal Weight4390gsmTotal Thickness6mm

Backing 100% Envirobase - minimum of 75% recycled material

Additional Backing Komfort Bac available on request

 Tile Size
 50cm x 50cm

 Tiles Per Box
 20 (5m²)

Wear Classification Heavy Contract Class 33

Luxury Class LC1

Anti-static Suitable for use with computers.

Less than 2Kv

Colour Fastness Light (BS EN ISO 105:B02) >6

Shampoo (BS 1006:UK-TB:1990) 4-5 Dry Rubbing (BS EN ISO 105:B01) 4-5 Wet Rubbing (BS EN ISO 105:X12) 4-5

Flammability BS5287 Assessment and labelling

of Textile Floorcovering tested to BS4790 (Hot Metal Nut Test) -

Low Radius of Char Class Bfl-s1

BS EN 13501 Class Bfl-s1
Impact Noise Reduction 26dB

Castor Chair Test Suitable for intensive use with

castor chairs

Warranty 10 years


VOC Content E1 in relation to EN 14041:2004

Environmental Status BREEAM® A Rated

ECONYL®

The ECONYL® Regeneration System recovers waste (fishing nets) which would otherwise end up in landfill or the ocean, causing serious damage to the ecosystem. The unique process that allows Aquafil to produce 100% regenerated Nylon yarn using waste material instead of fossil raw material.

Compared to common Nylon 6, ECONYL® fiber reduces approximately 50% of the CO2 equivalent emissions per kg of yarn, providing real savings in terms of emissions.







Flex, 2620 (LRV - 4.97)



Blaze, 2604 (LRV - 4.24)



Ignite, 2603 (LRV - 6.09)

Spark, 2621

(LRV - 4.57)


Rapid, 2614

(LRV - 5.53)

Force, 2605 (LRV - 7.47)



Extreme, 2606 (LRV - 5.11)



Vivid, 4504 (LRV - 4.38)



Breeze, 4109



Plasma, 2619 (LRV - 4.39)



Grey Highlight Fusion, 8226 (LRV - 4.69)

Style Tufted 1/10" Gauge Loop Pile Tile **Yarn Construction** 100% Solution Dyed / Space Dyed Nylon

Pile Yarn Weight 610gsm Pile Height 3mm **Total Weight** 4400gsm **Total Thickness** 6mm **Backing** 100% Envirobase - minimum

of 75% recycled material **Additional Backing** Komfort Bac available on request

Tile Size 50cm x 50cm Tiles Per Box 20 (5m²)

Wear Classification Heavy Contract Class 33

Luxury Class

Colour Fastness

Anti-static Suitable for use with computers.

Less than 2Kv

Light (BS EN ISO 105:B02) >6 Shampoo (BS 1006:UK-TB:1990) 4-5

Dry Rubbing (BS EN ISO 105:B01) 4-5 Wet Rubbing (BS EN ISO 105:X12) 4-5

Flammability BS5287 Assessment and labelling

of Textile Floorcovering tested to BS4790 (Hot Metal Nut Test) -Low Radius of Char

BS EN 13501 Class Bfl-s1

Impact Noise Reduction


Castor Chair Test Suitable for continuous use with

castor chairs

10 years Warranty

VOC Content E1 in relation to EN 14041:2004

Environmental Status BREEAM® A Rated







Islington Tunnel, 5014 (LRV - 5.54)



Nobu Grey, 7002 (LRV - 15.67)



Apollo Blue, 5004 (LRV - 4.42)



Regents Canal, 4018 (LRV - 5.12)



Clockhouse Blue, 4009 (LRV - 3.72)



Broadway, 3012 (LRV - 8.17)



Docklands Grey, 3013 (LRV - 9.01)



Millennium Blue, 3001 (LRV - 8.18)



Victoria Blue, 5181 (LRV - 2.92)



Westow Park Plum, 3016 (LRV - 7.50)

Pile Yarn Weight 600gsm Pile Height 3mm **Total Weight** 4390gsm **Total Thickness** 6mm Backing

100% Envirobase - minimum of 75% recycled material **Additional Backing** Komfort Bac available on request

Tile Size 50cm x 50cm Tiles Per Box 20 (5m²)

Wear Classification Heavy Contract Class 33

Luxury Class

Colour Fastness

Warranty

Anti-static Suitable for use with computers.

Less than 2Kv

Light (BS EN ISO 105:B02) >6 Shampoo (BS 1006:UK-TB:1990) 4-5 Dry Rubbing (BS EN ISO 105:B01) 4-5

Wet Rubbing (BS EN ISO 105:X12) 4-5

Flammability BS5287 Assessment and labelling of Textile Floorcovering tested to BS4790 (Hot Metal Nut Test) -Low Radius of Char


BS EN 13501 Class Bfl-s1 **Impact Noise Reduction**

Castor Chair Test Suitable for intensive use with

castor chairs

VOC Content E1 in relation to EN 14041:2004

Environmental Status BREEAM® A Rated







Axis, 8181 (LRV - 4.00)



Axis Accent, 8228 (LRV - 5.78)



Binary, 9191 (LRV - 9.59)



Binary Accent, 9183 (LRV - 17.50)



Index, 2181 (LRV - 4.60)



Index Accent, 2247 (LRV - 7.73)



Hex, 7181 (LRV - 4.77)



Hex Accent, 7248 (LRV - 7.22)



Digital, 6181 (LRV - 4.32)



Digital Accent, 6176 (LRV - 4.62)



Pathway, 5151 (LRV - 11.59)



Pathway Accent, 5229 (LRV - 21.82)

Style Tufted 1/10" Gauge Loop Pile Tile **Yarn Construction** 100% Solution Dyed Nylon Pile Yarn Weight 600gsm Pile Height 3mm **Total Weight** 4390gsm **Total Thickness** 6mm Backing 100% Envirobase - minimum of 75% recycled material **Additional Backing** Komfort Bac available on request Tile Size 50cm x 50cm Tiles Per Box 20 (5m²) Wear Classification Heavy Contract Class 33 **Luxury Class** Anti-static Suitable for use with computers. Less than 2Kv **Colour Fastness** Light (BS EN ISO 105:B02) >5

Shampoo (BS 1006:UK-TB:1990) 4-5 Dry Rubbing (BS EN ISO 105:B01) 4-5 Wet Rubbing (BS EN ISO 105:X12) 4-5

Flammability

BS5287 Assessment and labelling of Textile Floorcovering tested to BS4790 (Hot Metal Nut Test) - Low Radius of Char

BS EN 13501 Class Bfl-s1 Impact Noise Reduction 26dB


Warranty


Castor Chair TestSuitable for intensive use with castor chairs

castor chai 10 years

VOC Content E1 in relation to EN 14041:2004

Environmental Status BREEAM® A Rated



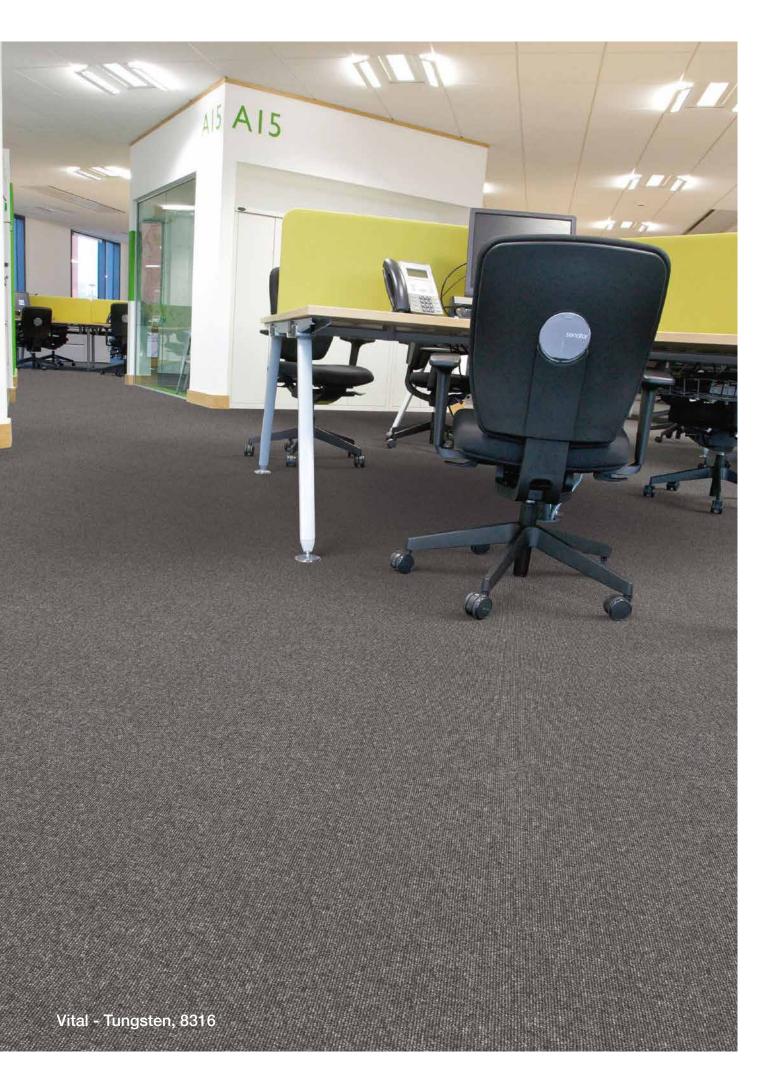

LOOP PILE

| Workspace Loop | 36 |
|--------------------------------|----|
| Evolve | 38 |
| Diversity and Diversity Groove | 40 |
| Vital | 44 |
| Toccarre | 46 |
| Sirocco and Sirocco Stripe | 48 |
| Macaw and Macaw Stripe | 52 |





Silver, 8031 (LRV - 13.24)



Platinum, 9235 (LRV - 8.62)




(LRV - 6.36)



Moorland, 8052 (LRV - 10.05)





Blue Moon, 6123 (LRV - 7.68)



Midnight, 6159 (LRV - 4.17)



Blue Yonder, 6245 (LRV - 3.68)



Magenta Rock, 7246 (LRV - 4.42)



Rose, 2152 (LRV - 6.36)



Sepia, 1160 (LRV - 7.20)



Apple, 6229 (LRV - 21.82)



Pampas, 5157 (LRV - 10.13)



Graphite, 8025 (LRV - 5.51)



Kingfisher, 5329 (LRV - 10.12)



Blueberry, 6155 (LRV - 8.61)



Ruby, 2182 (LRV - 5.35)



Onyx, 8181 (LRV - 2.47)



Indigo, 6049 (LRV - 4.37)



Lavender, 7035 (LRV - 8.20)



Sandstone, 1015 (LRV - 17.28)

Pile Yarn Weight 580gsm Pile Height 3mm **Total Weight** 4370gsm **Total Thickness** 6mm

Backing 100% Envirobase - minimum of 75% recycled material **Additional Backing** Komfort Bac available on request

Tile Size 50cm x 50cm Tiles Per Box 20 (5m²)

Wear Classification Heavy Contract Class 33

Luxury Class

Colour Fastness

Anti-static Suitable for use with computers.

Less than 2Kv

Light (BS EN ISO 105:B02) >6 Shampoo (BS 1006:UK-TB:1990) 4-5

Dry Rubbing (BS EN ISO 105:B01) 4-5 Wet Rubbing (BS EN ISO 105:X12) 4-5

Flammability BS5287 Assessment and labelling

of Textile Floorcovering tested to BS4790 (Hot Metal Nut Test) -Low Radius of Char

BS EN 13501 Class Bfl-s1 **Impact Noise Reduction** 26dB


Castor Chair Test Suitable for intensive use with

castor chairs

10 years Warranty

VOC Content E1 in relation to EN 14041:2004

Environmental Status BREEAM® A Rated







Pebble

(LRV - 5.32)

Shoreline

Rockpool

Mineral

(LRV - 10.23)

(LRV - 5.89)

(LRV - 9.62)

Seacrest (LRV - 7.66)



Reef (LRV - 12.00)



Basalt (LRV - 7.30)



Atlantis (LRV - 3.35)



Lagoon (LRV - 5.04)



Tide (LRV - 7.05)



Style

Yarn Construction

Tufted Loop Pile

100% Solution Dyed Nylon (75% Recycled content)

Tuft Gauge 1/10" Pile Yarn Weight 580gsm

3mm (+/- 0.5mm) Pile Height

Total Weight 4,370gsm 208,800 /m² **Pile Density** Thickness 6mm (+/- 0.5mm)

Backing

100% Envirobase - minimum of 75% recycled materials

Suitable for use with computers. Less than 2Kv Anti-static

Wear Classification Heavy Contract Class 33

Luxury Class LC1

Colour Fastness Light (BS EN ISO 105:B02) >6

To Water (BS EN ISO 105:E01) 4-5 To Shampoo (BS 1006-UK-TB) 4-5 Rubbing (BS EN ISO 105:X12) 4-5

Flammability


BS 4790 Low Radius of Char EN 13501-1 Classification Bfl-s1

Impact Noise Reduction 26dB

Castor Chair BS EN 985 r value 3.3 - Suitable for intensive use

10 Years Warranty

voc E1 in relation to EN 14041:2004







Panther, 812 (LRV - 2.94)



Foundry Grey, 810 (LRV - 6.63)



London Stone, 820 (LRV - 10.04)



Liberty, 612 (LRV - 3.13)




Electric, 625 (LRV - 5.12)



Racing Green, 505 (LRV - 4.89)



Razzmic Berry, 740 (LRV - 6.07)



Blazer, 210 (LRV - 4.52)



Lupus Grev. 811 (LRV - 5.32)



Mouse, 830 (LRV - 16.28)



Denim, 616 (LRV - 4.95)



Skylight, 640 (LRV - 7.65)



Grasshopper, 550 (LRV - 14.41)



Purple Rain, 750 (LRV - 4.26)



Bark, 108 (LRV - 9.82)

Pile Yarn Weight 540gsm Pile Height 3mm **Total Weight** 4330gsm **Total Thickness** 5.5mm

Backing 100% Envirobase - minimum of 75% recycled material **Additional Backing** Komfort Bac available on request

Tile Size 50cm x 50cm Tiles Per Box 20 (5m²)

Wear Classification Heavy Contract Class 33

Luxury Class

Colour Fastness

Warranty

Anti-static Suitable for use with computers.

Less than 2Kv

Light (BS EN ISO 105:B02) >6 Shampoo (BS 1006:UK-TB:1990) 4-5 Dry Rubbing (BS EN ISO 105:B01) 4-5

Wet Rubbing (BS EN ISO 105:X12) 4-5

Flammability BS5287 Assessment and labelling

of Textile Floorcovering tested to BS4790 (Hot Metal Nut Test) -Low Radius of Char


BS EN 13501 Class Bfl-s1 **Impact Noise Reduction**

Castor Chair Test Suitable for intensive use with

castor chairs 10 years

VOC Content E1 in relation to EN 14041:2004



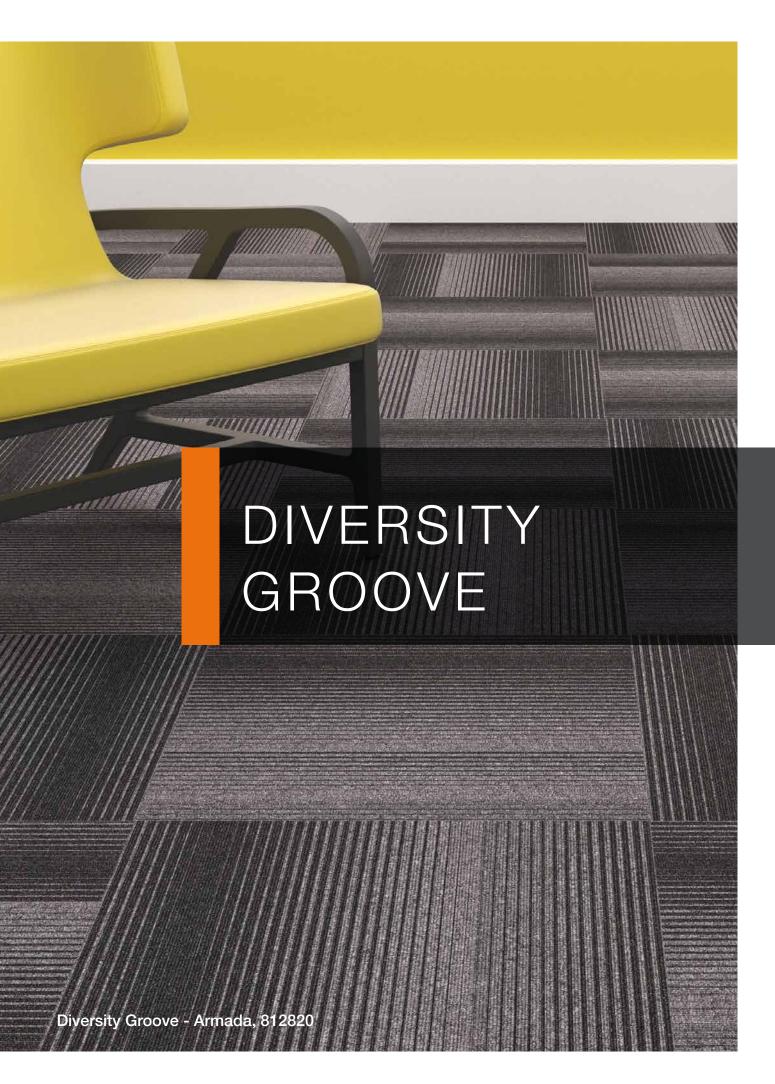



Vibe, 810820 (LRV - 8.04)



Asha, 812810 (LRV - 4.39)



Jaxx, 616810 (LRV - 5.74)



Armada, 812820 (LRV - 5.31)



Gusto, 616812 (LRV - 3.57)

Pile Yarn Weight 540gsm Pile Height 3mm **Total Weight** 4330gsm **Total Thickness** 5.5mm

Backing 100% Envirobase - minimum of 75% recycled material

Additional Backing Komfort Bac available on request Tile Size 50cm x 50cm Tiles Per Box 20 (5m²)

Wear Classification Heavy Contract Class 33

Luxury Class

Anti-static Suitable for use with computers.

Less than 2Kv

Colour Fastness

Light (BS EN ISO 105:B02) >6 Shampoo (BS 1006:UK-TB:1990) 4-5

Dry Rubbing (BS EN ISO 105:B01) 4-5 Wet Rubbing (BS EN ISO 105:X12) 4-5

Flammability BS5287 Assessment and labelling

of Textile Floorcovering tested to BS4790 (Hot Metal Nut Test) -Low Radius of Char

BS EN 13501 Class Bfl-s1 **Impact Noise Reduction** 26dB

Suitable for intensive use with **Castor Chair Test**


castor chairs

Warranty 10 years

VOC Content E1 in relation to EN 14041:2004

BREEAM® A Rated **Environmental Status**

Diversity Groove is a random lay product

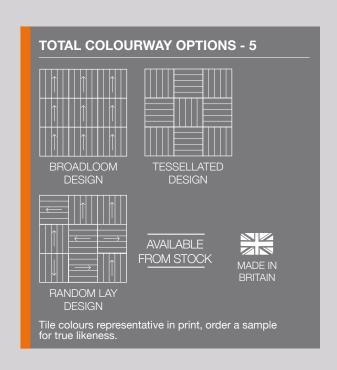





(LRV - 7.11)





Tungsten, 8316 (LRV - 5.09)



Carbon, 8007 (LRV - 2.54)



Krypton, 6100 (LRV - 11.69



Hydrogen, 6120 (LRV - 9.40)



Granite, 8302 (LRV - 9.86)



Glacier, 6013 (LRV - 6.90)



Marine, 6310 (LRV - 6.30)



Sea Blue, 6011 (LRV - 5.49)



Nickel, 868302 (LRV - 7.54)



Zinc, 878302 (LRV - 6.91)



Ice, 876013 (LRV - 4.85)



Zicron, 6890 (LRV - 10.93)



Arctic, 876310 (LRV - 4.26)



Oxide, 1193 (LRV - 8.77)

Pile Yarn Weight 500gsm Pile Height 3mm **Total Weight** 4090gsm **Total Thickness** 5.5mm

Backing 100% Envirobase - minimum of 75% recycled material **Additional Backing** Komfort Bac available on request

Tile Size 50cm x 50cm Tiles Per Box 20 (5m²)

Wear Classification Heavy Contract Class 33

Luxury Class

Anti-static Suitable for use with computers.

Less than 2Kv

Colour Fastness Light (BS EN ISO 105:B02) >6

Shampoo (BS 1006:UK-TB:1990) 4-5 Dry Rubbing (BS EN ISO 105:B01) 4-5 Wet Rubbing (BS EN ISO 105:X12) 4-5

Flammability BS5287 Assessment and labelling

of Textile Floorcovering tested to BS4790 (Hot Metal Nut Test) -Low Radius of Char

Class Bfl-s1


BS EN 13501 Impact Noise Reduction

Suitable for intensive use with **Castor Chair Test**

castor chairs

10 years Warranty

E1 in relation to EN 14041:2004 **VOC Content**







Termi, 8554 (LRV - 8.96)



Grigia, 9559 (LRV - 16.22)



Moderno, 6553 (LRV - 4.98)



Blu, 6558 (LRV - 8.91)



Marrone, 1656 (LRV - 8.88)



Menta, 5560 (LRV - 6.34)



Desmo, 2640 (LRV - 4.52)



Tutto, 6569 (LRV - 2.19)



Azzurra, 6339 (LRV - 7.75)



Fresco, 1652 (LRV - 7.85)



Montagna, 1545 (LRV - 13.25)



La Mela, 5550 (LRV - 8.36)

Pile Yarn Weight 630gsm Pile Height 3mm **Total Weight** 4420gsm **Total Thickness** 6mm

100% Envirobase - minimum Backing of 75% recycled material **Additional Backing** Komfort Bac available on request

Tile Size 50cm x 50cm Tiles Per Box 20 (5m²)

Wear Classification Heavy Contract Class 33

Luxury Class

Colour Fastness

Anti-static Suitable for use with computers.

Less than 2Kv

Shampoo (BS 1006:UK-TB:1990) 4-5 Dry Rubbing (BS EN ISO 105:B01) 4-5 Wet Rubbing (BS EN ISO 105:X12) 4-5

Flammability BS5287 Assessment and labelling

of Textile Floorcovering tested to BS4790 (Hot Metal Nut Test) -Low Radius of Char

Light (BS EN ISO 105:B02) >6

BS EN 13501 Class Cfl-s1 Impact Noise Reduction 25dB

Castor Chair Test Suitable for intensive use with

castor chairs

10 years Warranty VOC Content E1 in relation to EN 14041:2004







Jet, 821S (LRV - 2.78)



Quartz, 101S (LRV - 5.15)



Pewter, 171S (LRV - 15.55)



Sapphire, 501S (LRV - 4.95)



Blue John, 896S (LRV - 5.78)



Topaz, 458S (LRV - 8.50)



Tempest, 277S (LRV - 3.22)



Paprika, 459S (LRV - 6.71)



Tanzanite, 743S (LRV - 4.84)



Lime, 318S (LRV - 15.29)

Pile Yarn Weight 580gsm Pile Height 3.5mm 4370gsm **Total Weight Total Thickness** 6.5mm Backing

100% Envirobase - minimum of 75% recycled material Additional Backing Komfort Bac available on request

Tile Size 50cm x 50cm Tiles Per Box 20 (5m²)

Wear Classification Heavy Contract Class 33

Luxury Class

Colour Fastness

Impact Noise Reduction

Warranty

Anti-static Suitable for use with computers.

Less than 2Kv

Light (BS EN ISO 105:B02) >6 Shampoo (BS 1006:UK-TB:1990) 4-5

Dry Rubbing (BS EN ISO 105:B01) 4-5 Wet Rubbing (BS EN ISO 105:X12) 4-5

Flammability BS5287 Assessment and labelling

of Textile Floorcovering tested to BS4790 (Hot Metal Nut Test) -Low Radius of Char

BS EN 13501 Class Bfl-s1

Castor Chair Test Suitable for intensive use with

castor chairs 10 years

24dB







Liquorice, 821101S (LRV - 3.79)



Humbug, 101171S (LRV - 12.76)



Bubblegum, 821458S (LRV - 5.66)



Blue Candy, 501458S (LRV - 7.23)



Spearmint, 318101S (LRV - 9.89)

Pile Yarn Weight 580gsm Pile Height 3.5mm **Total Weight** 4370gsm **Total Thickness** 6.5mm

100% Envirobase - minimum Backing of 75% recycled material Additional Backing Komfort Bac available on request

Tile Size 50cm x 50cm Tiles Per Box 20 (5m²)

Wear Classification Heavy Contract Class 33

Luxury Class

Anti-static Suitable for use with computers.

Less than 2Kv

Colour Fastness Light (BS EN ISO 105:B02) >6

Shampoo (BS 1006:UK-TB:1990) 4-5 Dry Rubbing (BS EN ISO 105:B01) 4-5 Wet Rubbing (BS EN ISO 105:X12) 4-5

Flammability BS5287 Assessment and labelling

of Textile Floorcovering tested to BS4790 (Hot Metal Nut Test) -Low Radius of Char

BS EN 13501 Class Bfl-s1 **Impact Noise Reduction**

Warranty

Castor Chair Test Suitable for intensive use with

castor chairs 10 years







Jet, 821M (LRV - 2.68)



Quartz, 101M (LRV - 5.94)



Pewter, 171M (LRV - 15.29)



Sapphire, 501M (LRV - 5.02)



Aegean, 831M (LRV - 8.17)



Paprika, 459M (LRV - 6.24)

Tufted 1/10" Gauge Loop Pile Tile Style 100% Solution Dyed Polypropylene **Yarn Construction**

Pile Yarn Weight 420gsm Pile Height 3.5mm **Total Weight** 4210gsm **Total Thickness** 6mm

100% Envirobase - minimum Backing of 75% recycled material

50cm x 50cm Tile Size Tiles Per Box 20 (5m²) Wear Classification General Contract

Luxury Class LC1

Anti-static Suitable for use with computers.

Less than 2Kv

Light (BS EN ISO 105:B02) >6 **Colour Fastness**

Shampoo (BS 1006:UK-TB:1990) 4-5 Dry Rubbing (BS EN ISO 105:B01) 4-5 Wet Rubbing (BS EN ISO 105:X12) 4-5

BS5287 Assessment and labelling Flammability

of Textile Floorcovering tested to BS4790 (Hot Metal Nut Test) -Low Radius of Char

BS EN 13501 Class Efl 22dB **Impact Noise Reduction**








Jet / Quartz, 821101M (LRV - 3.82)



Quartz / Pewter, 101171M (LRV - 12.56)



Aegean / Sapphire, 831501M (LRV - 6.75)



Lime / Quartz, 318101M (LRV - 9.33)

Style Tufted 1/10" Gauge Loop Pile Tile 100% Solution Dyed Polypropylene Yarn Construction

Pile Yarn Weight 420gsm Pile Height 3.5mm **Total Weight** 4210gsm **Total Thickness** 6mm

100% Envirobase - minimum Backing of 75% recycled material

50cm x 50cm Tile Size Tiles Per Box 20 (5m²) Wear Classification General Contract

Luxury Class LC1

Anti-static Suitable for use with computers.

Less than 2Kv

Light (BS EN ISO 105:B02) >6 Colour Fastness


Shampoo (BS 1006:UK-TB:1990) 4-5 Dry Rubbing (BS EN ISO 105:B01) 4-5 Wet Rubbing (BS EN ISO 105:X12) 4-5

BS5287 Assessment and labelling Flammability

of Textile Floorcovering tested to BS4790 (Hot Metal Nut Test) -Low Radius of Char


BS EN 13501 Class Efl Impact Noise Reduction 22dB



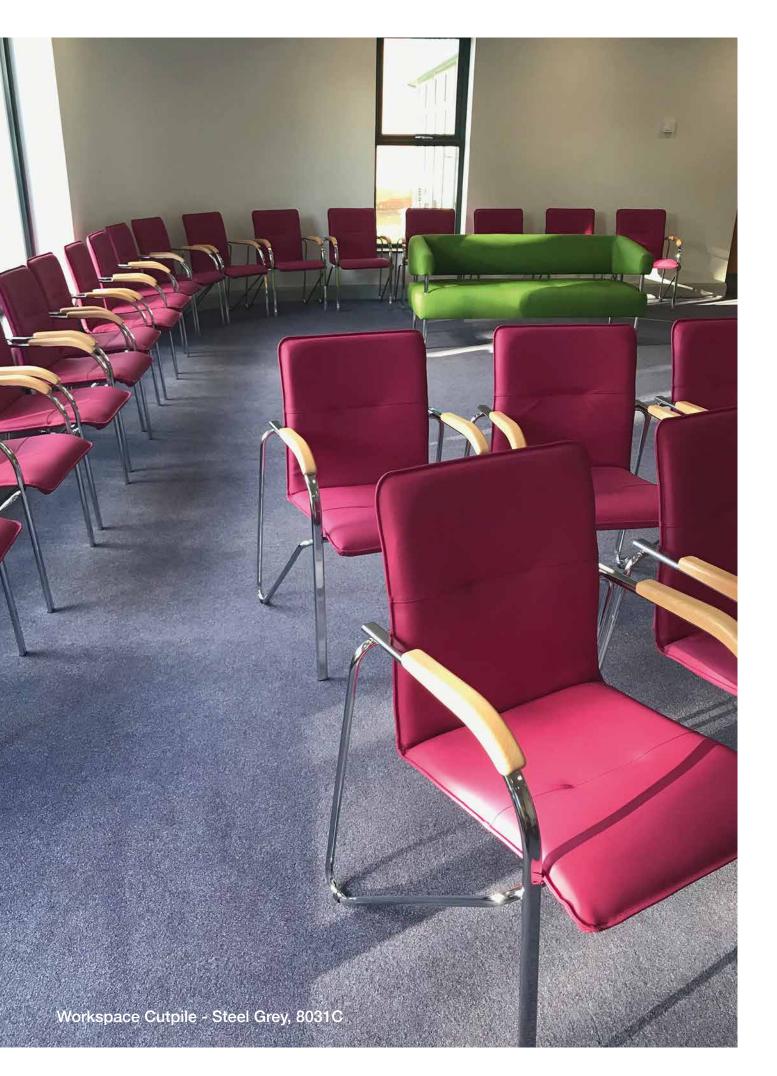

CUT PILE

| Maestro | 58 |
|--------------------|----|
| Workspace Cut Pile | 60 |

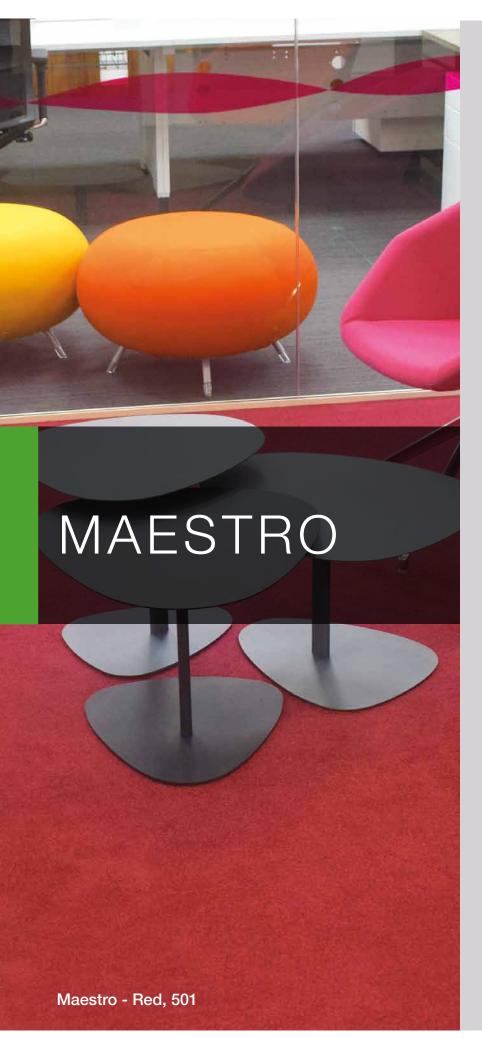



Charcoal, 903 (LRV - 3.05)



Twilight Cinders, 991 (LRV - 2.18)



Silver, 900 (LRV - 12.15)



Woodland Fern*, 662 (LRV - 16.47)



Brooklyn Nights, 963 (LRV - 5.06)



Sapphire*, 101 (LRV - 6.43)



Celestial Blue*, 569 (LRV - 10.34)



Blue Diamond, 506 (LRV - 12.87)




Turquoise*, 200 (LRV - 7.76)



Steel, 902 (LRV - 5.88)



Night Jewel, 994 (LRV - 12.55)



Deep Blue, 103 (LRV - 2.72)



Royal Regatta, 533 (LRV - 3.36)



Azure Fusion*, 595 (LRV - 6.81)



Teal, 100 (LRV - 9.23)




Emerald Orchestra*, 511 (LRV - 9.26)




Dark Green, 201 (LRV - 3.95)



Style Tufted 1/10" Gauge Cut Pile Tile **Yarn Construction** 100% Nylon 66 Pile Yarn Weight 1050gsm Pile Height 5mm **Total Weight** 4650gsm **Total Thickness** 8mm Backing 100% Envirobase - minimum of 75% recycled material Additional backing Komfort Bac available on request Tile Size 50cm x 50cm Tiles Per Box 20 (5m²) Wear Classification Heavy Contract Class 33 Luxury Class Anti-static Suitable for use with computers. Less than 2Kv **Colour Fastness** Light (BS EN ISO 105:B02) >5 Wet Rubbing (BS EN ISO 105:X12) >4 Flammability BS5287 Assessment and labelling of Textile Floorcovering tested to BS4790 (Hot Metal Nut Test) -Low Radius of Char **BS EN 13501** Class Bfl-s1 Impact Noise Reduction 28dB **Castor Chair Test** Suitable for use with castor chairs Warranty **VOC Content** E1 in relation to EN 14041:2004



^{*}These colours are subject to a minimum order quantity of 200m²

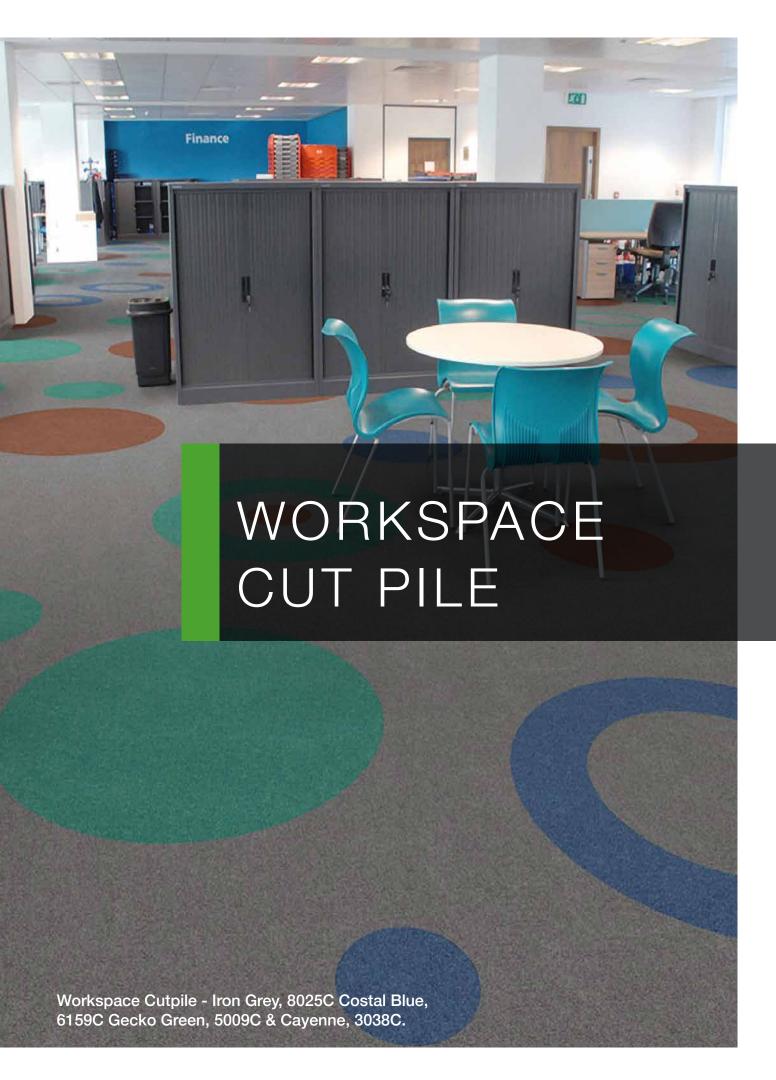



Steel Grey, 8031C (LRV - 11.62)



Iron Grey, 8025C (LRV - 5.26)





Sky Blue, 6123C



Nordic Green, 5011C (LRV - 8.15)



Grape Blue, 6155C (LRV - 6.91)



Salsa, 7040C (LRV - 3.28)



Wheat, 1015C (LRV - 16.70)



Coastal Blue, 6159C (LRV - 3.59)



Biscay Blue, 6051C (LRV - 3.35)



Gecko Green, 5009C (LRV - 9.72)



Lilac, 7035C (LRV - 6.59)



Cayenne, 3038C (LRV - 6.11)

Tufted 1/10" Gauge Cut Pile Tile Style 100% Solution Dyed Nylon **Yarn Construction**

Pile Yarn Weight 850gsm Pile Height 5mm **Total Weight** 4650gsm **Total Thickness** 8.5mm

100% Envirobase - minimum Backing of 75% recycled material

Tile Size 50cm x 50cm Tiles Per Box 16 (4m²)

Wear Classification Heavy Contract Class 33

Luxury Class LC2

Flammability

Anti-static Suitable for use with computers.

Less than 2Kv

Colour Fastness Light (BS EN ISO 105:B02) 6


Wet Rubbing (BS EN ISO 105:X12) 4-5 BS5287 Assessment and labelling

of Textile Floorcovering tested to BS4790 (Hot Metal Nut Test) -Low Radius of Char

Class Bfl-s1

BS EN 13501 Impact Noise Reduction 28dB

Castor Chair Test Suitable for use with castor chairs Warranty





LUXURY COMMERCIAL VINYL

| Rappórt | 64 |
|---------|----|
| Duera | 66 |



WOOD EFFECT



Grey Limed Oak, 2798



Lakeside Pine, 2889



Burnt Sienna Wood, 2893



Shadow Ash, 2894



French Grey Elm*, 2895



Bowland Oak, 2896



Midsummer Oak, 2897



Orchard Oak, 2898



Kentucky Timberwood, 2899



Dockyard Oak, 2947



Chalet Oak, 2948

STONE EFFECT



Seasoned Concrete, 2969



Copper Metalstone, 2970



Dark Metalstone, 2979



Fresh Concrete, 2799



Ashen Concrete, 2796

Luxury Commercial Vinyl

Heterogenous PVC

18.42cm x 121.92cm *152.4 x 1219.2

45.72cm x 91.44cm

Less than 2Kv

Class Bfl-s1

< 0.1%

0.05mm

Suitable for use with computers.

Light (BS EN ISO 105:B02) ≥6

Suitable for use with castor chairs

Suitable, maximum 27°C

PUR

4290gsm

2.5mm

Style

Material

Surface Treatment Total Weight

Wear Layer Thickness

Wood Effect Plank Size

Stone Effect Plank Size

Wood Effect Planks Per Box 15 (3.37m²) Stone Effect Planks Per Box 8 (3.34m²)

Total Thickness

Anti-static

Colour Fastness Flammability BS EN 13501

Castor Chair Test

Dimensional Stability

Residual Indentation

Underfloor Heating

*152.4 x 1219.2



WOOD EFFECT



Twilight Ash, 3121



Barleycorn Oak, 3128



Devonshire Oak, 3129



Edwardian Oak, 3131



Dark Linear Wood, 3123



Wharf Side Ash, 3124

StyleLuxury Commercial VinylMaterialHeterogenous PVC

 Surface Treatment
 PUR

 Total Weight
 8000gsm

 Total Thickness
 5mm

 Wear Layer Thickness
 0.7mm

 Wood Effect Plank Size
 17.78cm x 121.92cm

 Stone Effect Plank Size
 30.48cm x 60.96cm

 Stone Effect Tile Size
 60cm x 60cm

 Wood Effect Planks Per Box
 10 (2.17m²)

 Stone Effect Planks Per Box
 8 (1.86m²)

Anti-static Suitable for use with computers.

Less than 2Kv

Colour Fastness Light (BS EN ISO 105:B02) ≥6

Flammability BS EN 13501

EN 13501 Class Bfl-s1

 Castor Chair Test
 Suitable for use with castor chairs

Dimensional Stability<0.1%</th>Residual Indentation0.05mm

Stone Effect Tiles Per Box 6 (2.16m²)

Underfloor Heating Suitable, maximum 27°C

Hemingway Oak, 3126

STONE EFFECT



Polished Cement, Tile, 3132



Alloyed Cement, Tile, 3133




Downtown Cement, Tile, 3135



Suburban Cement, Tile, 3134



Cliffside Slate, Plank, 3136

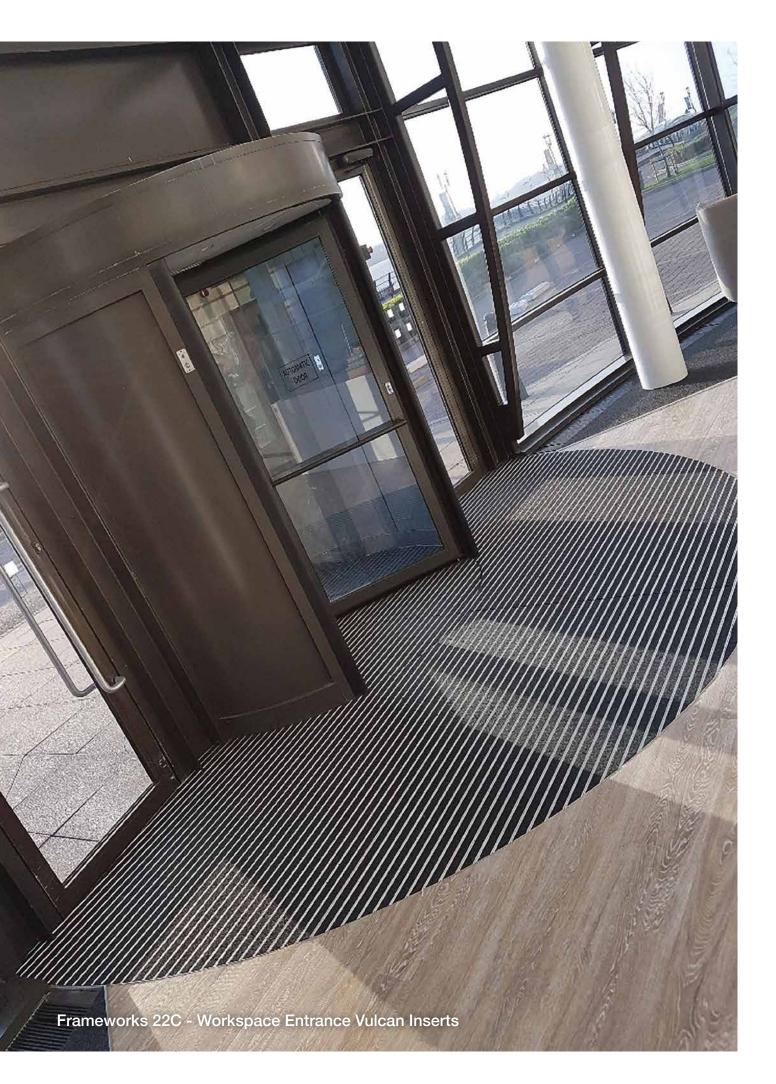

ENTRANCE MATTING

PRIMARY

Frameworks 70
Treadloc 25 72
Entrack 50 76
Treadsure 205 78

SECONDARY

Workspace Entrance 80

PRIMARY


FRAMEWORKS

Frameworks is a unique range of tough and durable aluminium entrance systems with a host of material and colour insert options.

How to choose your frameworks system:


Stage 1:


Select your height



Stage 2:

Pick your construction





Open - collect dirt and moisture inside the mat/matwell rather than on the surface.

Rollable for cleaning.

Closed - Dirt and moisture collected on the surface of the mat.

Stage 3:

Pick your insert from 13 options











Frameworks 12



Frameworks 15C




Frameworks 170P




Frameworks 17C




Frameworks 220P



Frameworks 22C



Frameworks 17CS




Frameworks Clic-Fix

C = Closed
OP = Open
CS = Closed Scraper
DR = Drainable




Available colourways:




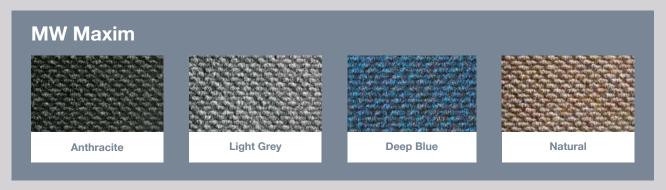

Accessories:









INSERT OPTIONS



Workspace Entrance Victor



Workspace Entrance Vixen



Workspace Entrance



Workspace Entrance Viscount



Premier Mercury



Premier Charcoal



Premier Dark Blue



MW Maxim Yellow and MW Maxim Anthracite

Easy Inter-locking system as standard. Removable male and female connectors. **Locking Guides**

Composition Nitrile rubber composition **Dry Rubbing** (BS1006:X12) 4 - 5 Wet Shampoo (851006:UK-TB) 4 - 5

Nitrile Rubber is resistant to oil, grease & Performance

25cm x 25cm

Resistant to stable temperatures

Dimensions

40-180 C

Wear Classification Heavy Contract Class 33 Diamond 12,300gsm Premier 13,500gsm **Product Weight** Flammability BS EN 13501 - Cfl-s1

Twice the weight of leading competitor products - twice the durability

Treadloc 25 provides a flammability rating of Cfl-s2 (BS EN 14041:2004)



Perfect for Healthcare

The nitrile rubber in Treadloc 25 is now manufactured with copper compounds, a material that has been proven to have anti-microbial properties, combating the spread of hospital-acquired infections, including MRSA.

The product has been tested to ISO 22196, which specifies a method of evaluating the antibacterial activity of antibacterial-treated plastics, and other non-porous surfaces of products.

The results showed that the copper in the Treadloc 25 killed 99.29% of MRSA Bacterium.

in both dry and wet conditions.



Light Grey When examined under the Coefficient of Friction test (TRRL Pendulum test in accordance with BS 7976-2:200+A1:2013), Treadloc 25 has been proven to provide a low risk for slips



MW Rib HD inserts now available






Deep Blue



NO MATWELL OR RECESS? NO PROBLEM! TREADLOC 25 HAS AN OPTIONAL CLICK-FIT RAMPING SYSTEM...



Dimensions: W 125mm x H 125mm



Dimensions: W 66mm x L 2000mm x H 12mm



TREADLOC 25 RAMPING SOLUTION

Description:

Treadloc 25 can be surface-mounted, with the option of a heavy duty click-fit ramping system, making the product suitable for buildings without a matwell or recess.


The heavy-duty ramped edges allow wheeled and trolley access, as well as helping to prevent trip accidents. The system allows our popular products to be used to create a 'surface matwell' where a mat is laid directly on top of the floor.

Key Features:

- Ramping system to enable Treadloc 25 to be surface-mounted
- Click fit mechanism for easy installation
- Made from durable nitrile rubber
- Pre-mitred corners for accuracy
- Available in 2m lengths
- Incorporate a colour of your choice into the ramp debris channel, for a striking and stand-out finish (as shown in the image on the left).










Treadloc 25 surface mounted with ramping solution

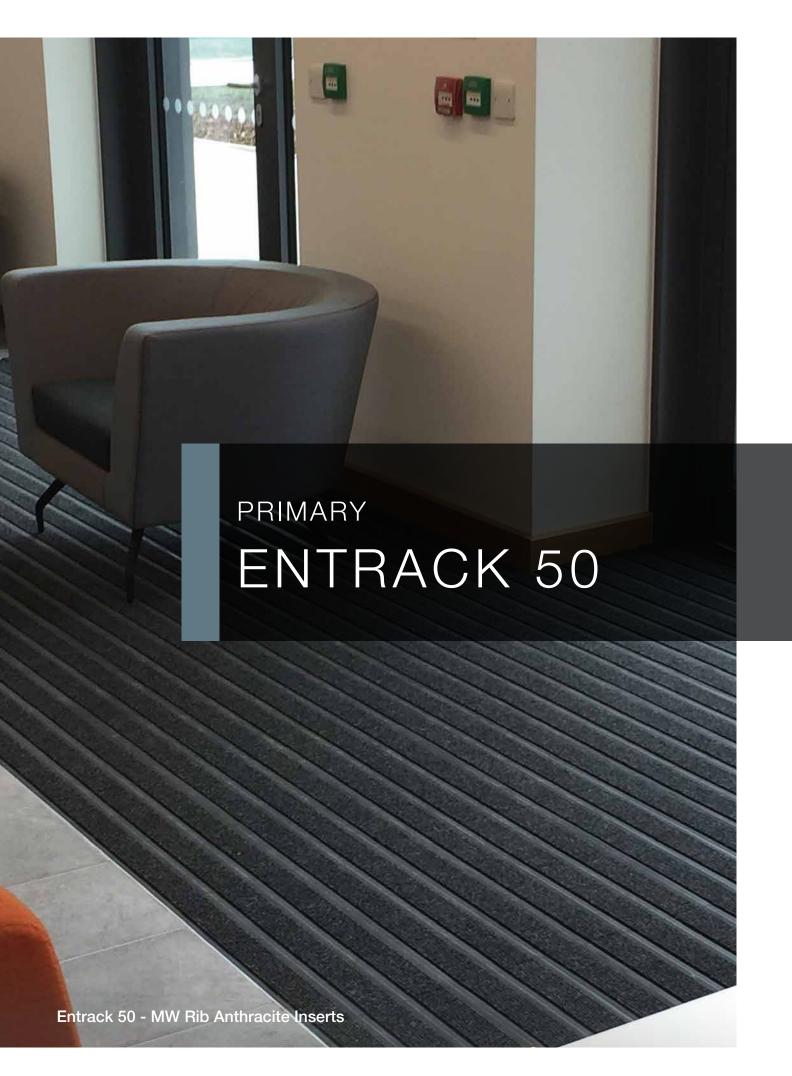

INSERT OPTIONS



Workspace Entrance Vulcan




Workspace Entrance Victor



Viscount





Dimensions 50cm x 50cm Insert Width 85mm Connection

Integral 'lock down' fixing system

Colourway Options

Environmental options

Recyclable and reusable

Non-pvc polymer base



Workspace Entrance Vixen



Premier Dark Blue



Premier Charcoal



Premier Mercury





MW Rib Light Grey




EXT Mat Anthracite

With its click fit connections, Entrack 50 can be installed with ease.



Connect Entrack 50 together to create any size entrance mat required:






A flexible modular system made from TPE which will not expand, contract or fade in colour. An extremely versatile product, Entrack 50 carpet strips are interchangeable and are suitable for entrances with or without matwells.

- High specification low profile platform

- Recyclable and reusable
 Will not tap, bounce or buckle under heavy footfall
 Easily cut and trimmed on site



Tile colours representative in print, order a full tile f or true likeness.

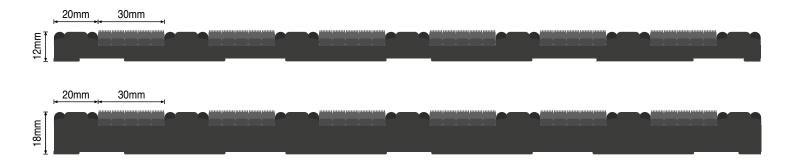



TREADSURE 205

Description:

Treadsure 205 by Mat. Works Entrance Solutions has been designed not just for extremely heavy footfall but also with wheeled traffic entrances in supermarkets, retail, education, and healthcare in mind - providing an alternative to aluminium matting systems. Manufactured from nitrile rubber to provide optimum performance and has a host of key features that set the product apart from any other standard modular matting system.

One of these is its sheer durability, which is provided by the product size and weight, ensuring it is one of the heaviest modular matting solutions available on the market. This sturdiness of Treadsure 205 provides significant durability when installed. It will not expand, contract, fade or become brittle, nor will it bend or buckle under pressure making it an ideal heavy contract solution for entrance areas in every sector.

The weight ensures, when installed correctly, that Treadsure will not move or slip in the matwell. It also makes installation easier, as there are no click or interlocking systems. If more than one system is needed, the modules are simply be placed next to each other-significantly reducing any potential installation times.

Simple to install in most matwells.

Weight cannot be rivalled in the current market.

Will not buckle or bounce under pressure, making it suitable for wheel and trolley traffic.

Perfect for healthcare environments due to its copper compounds - a material that has been proven to have anti-microbial properties, combating the spread of hospital-acquired infections, including MRSA.Can be fitted with a host of carpet inserts and debris <a href="https://channel.com/channel/

Can be fitted with a host of carpet inserts to match any style.

A cost-effective solution when compared to aluminium products.





INSERT OPTIONS



MW Rib HD Anthracite



MW Rib HD Natural



Workspace Entrance Viscount



Workspace Entrance Victor



MW Maxim Yellow and MW Maxim Anthracite (Safety Colour Inserts)



Premier Charcoal



MW Rib HD Light Grey



MW Rib HD Deep Blue



Workspace Entrance Vulcan



Workspace Entrance Vixen



Premier Dark Blue



Premier Mercury

Technical data:

Module Size Seamless Installation

Composition Performance

Wear Classification Weight Fire Rating

Anti-Microbial
Anti-Slip

205cm x 50cm x 12mm / 18mm

Seamlessly place two or more modules next to each other without the need for any locking mechanism

Nitrile rubber composition

Nitrile rubber is resistant to oil, grease, and fuel


Heavy Contract Class 33

14,000gsm (12mm), 20,000gsm (18m


CFL-S2

Tested to ISO 22196

TRRL Pendulum test - very low risk for slips in both dry and wet conditions

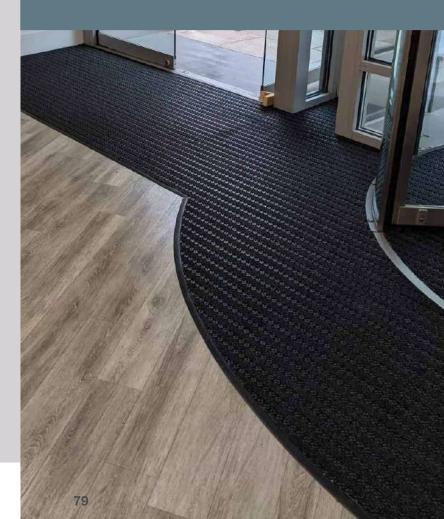





Vulcan (LRV - 3.48)



Vixen (LRV - 3.24)



Victor (LRV - 4.87)



Viscount (LRV - 2.69)

Style1/10th GaugeYarn Construction100% solution

Yarn Construction100% solution dyed nylonPile Yarn Weight1,000gsmPile Height5mm +/- 0.5mm

Total WeightTile 4,800 gsm / Sheet 1,800 gsmPile Density114,260 tufts per square metreTotal ThicknessTile 9mm / Sheet 8mm

Backing 100% Envirobase backing with minimum of 75% recycled material / Unitary Bac

imanaiana 50cm v 50cm tilo / 2m v 20m

Colour FastnessTo Water - 5
To Light - 5
To Rubbing - 4.5

Flammability BS 4790 - Low Radius of Char

BS EN 13501 - Cfl-s1

Warranty 10 years

VOC Content E1 in relation to EN 14041:2004

TOTAL COLOURWAY OPTIONS - 4

- All products conform to BS8300
- Low LRV values compared to aluminium, LVL and fibrebonded products ensuring a positive point difference is easy to achieve for areas where partially sighted traffic will be important to consider
- Equalities Act 2010 compliant
- Entrance matting resistant to point loading and scuffing from rubber wheels and walking aids





Tile colours representative in print, order a sample for true likeness.



INTRODUCING DATA CARPET TILES

Discover more about Paragon Carpet Tiles, one of the UK's leading design-led carpet tile manufacturers.



Environment

The Environmental culture at Paragon Carpet Tiles is 'reduce, reuse, recycle'. Our materials from sustainable sources/ with recycled content wherever possible. Employees are actively involved in setting and monitoring the achievement of environmental objectives and targets.


Air emissions from the production process are independently monitored for their environmental impact. Analysis has confirmed that emissions are less than 1% of Government targets.

Manufacturing activity and its impact on the environment are regularly audited by environmental health officers and have been confirmed as 'low risk', with a rating of 5 out of 175.

British Standards regularly audit the Environmental and Quality Management Systems to ensure continued compliance to accredited standards and to demonstrate continuous improvement.





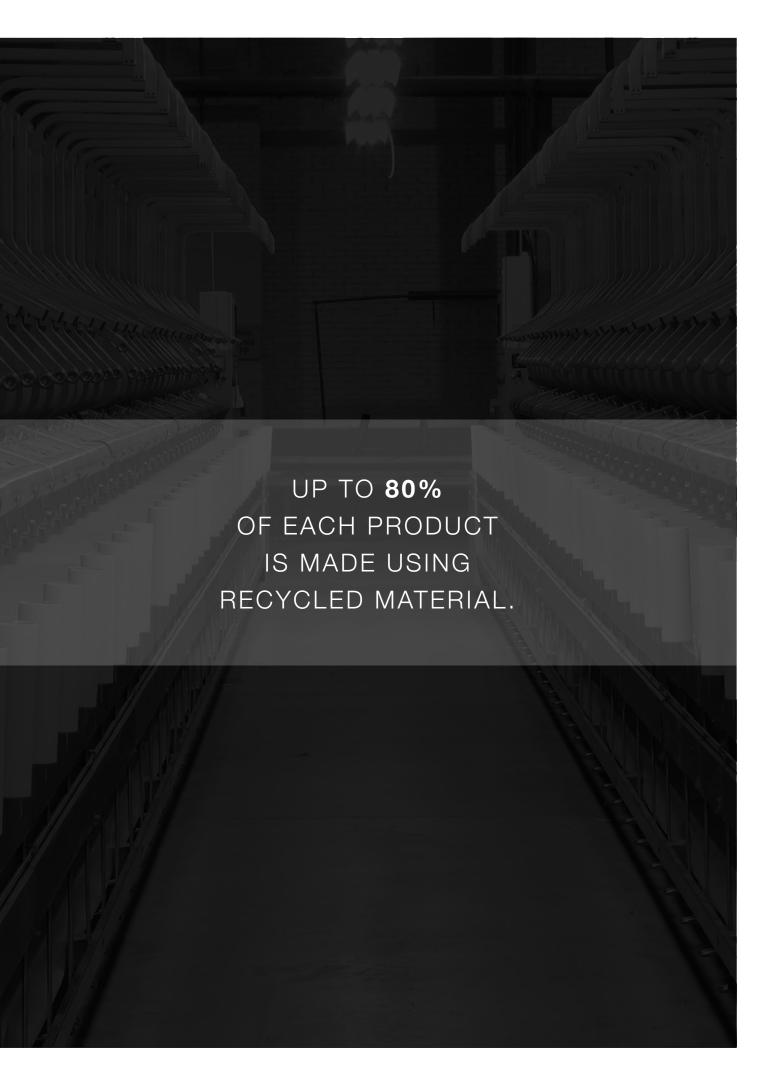















ISO 9001 Quality Management System



Sustainable Manufacturing

Raw materials are used wherever possible from sustainable sources and with recycled/reclaimed content. Currently, standard manufacture includes:

- Bitumen backing contained at least 75% of raw material
- Latex pre-coat backing contains at least 75% of raw materia
- Up to 80% of the total product is made using recycled materials
- Carpet varns contain up to 100% recycled content
- Pallets obtained from sustainable sources (FSC certified)
- Tile boxes are 100% recycled cardboard
- Production processes are not water dependent
- Committed to sustainable UK manufacturing
- Members of considerate constructors scheme
- BREAAM compliant
- Environmental Product Declarations (EPDs) available



CLEANING & MAINTENANCE GUIDE

To maximise the carpet's aesthetic appeal, performance and life expectancy, it is imperative to ensure at the specification stage that:

- 1. Carpets will be protected from other site activities during installation and thereafter.
- 2. Clients understand the enclosed information and that they accept responsibility for correct carpet care.
- 3. Carpets are protected from excess soiling or moisture in entrance areas, by use of an effective barrier material such as those from the MatWorks range

GENERAL CLEANING

Daily vacuuming with a twin motored upright vacuum cleaner, preferably with an adjustable head, is recommended. It is essential to remove all loose soil daily because if left to build up, the particles of dirt are much harder to remove and are more damaging to the fibre structure, thereby decreasing the life of the carpet.

Attention should be given to areas where there is extra traffic and in entrances to buildings where extra vacuuming is necessary.

Depending on the level of installation trafficking, the carpet should be periodically deep cleaned using high performance hot water extraction equipment.

Rotary brush cleaning not recommended.

A reputable contract cleaner should be used, preferably NCCA registered (for NCCA details visit www.ncca.co.uk). It is important that the carpet is deep cleaned at least once a year.

STAIN REMOVAL

It is essential to deal with spillages immediately and any subsequent stains as appropriate.

In the event of a spillage, immediately blot with a clean absorbent cloth until there is no further transfer from the carpet to the cloth. If any further stain remains or has otherwise been allowed to dry, the method will vary accordingly.

It is recognised that particularly for contract situations, if stains are not dealt with immediately, cleaning staff may not be in a position to identify the type of stain. A good quality, multipurpose stain remover is therefore very useful, although it must be understood that this will not successfully tackle all types of stains, and wherever possible the chart recommendations should be strictly followed.

Also any stains left over a period of time become increasingly more difficult to remove and may require several treatments.

In all cases, after stain removal, the carpet should be allowed to dry completely and then cleaned with a twin motored upright vacuum cleaner.

Solvent cleaning of bitumen backed tiles should preferably be avoided. Where this is not possible, extra caution should be taken and only very light surface cleaning should take place.

If any of the treatments listed are not successful, seek professional help.

The methods are recommended in good faith; however, we cannot accept responsibility for their use in any specific case.

CLEANING GUIDE

| Stain Type | Stain Removal Procedure |
|---|---|
| Tea / Coffee Food Fountain Pen Ink Water Based Paint | A liquid detergent solution such as Granwax Ezee Spot & Stain Remover. Apply the solution to the stained area. Lightly agitate affected areas & remove by use of absorbent cloth. Stubborn stains may require a second application. |
| Chewing Gum | Apply chewing gum remover then break-up and remove pieces or pierce gum with fork or Prochem Perforator Block then apply Citrus Gel or Solvall Spotter and leave for a few minutes. Remove softened gum with spatula or blunt knife. For large areas apply Bazooka Gum Remover in conjunction with Bazooka Gum Removal Machine. |
| Grease | Scrape up excess, hardened residue prior to wetting. Apply Solvex or Solvall Spotter and blot. Apply Citrus Gel and blot. Apply Stain Pro and blot. For larger areas apply Power Burst then rinse extract thoroughly. |
| Ink (solvent soluble) | Apply Solvex and blot – do not rub. Repeat as needed. If stain persists, apply Citrus Gel. Rinse thoroughly with water and blot until dry. Note: All inks are not the same and different approaches may have to be evaluated. |
| Milk | Apply Stain Pro and blot. Apply Fibre & Fabric Rinse solution and blot until dry. If stain persists apply Solvex or Citrus Gel and blot. Apply Neutral Pro-Spotter and blot. Rinse thoroughly with water and blot until dry. |
| Oils | Apply Solvall Spotter and blot or apply Citrus Gel and blot or apply Solvex and blot until dry. Where a solvent cannot be used apply Power Burst solution, brush and rinse with Fibre & Fabric Rinse solution. |
| Oil Based Paint / Varnish | Apply Solvall Spotter and blot or apply Citrus Gel and blot or apply Solvex and blot. Re-apply Solvex until as much paint as possible is removed then weight down the stain with towels for several hours to loosen. Apply Neutral Pro-Spotter, work into stain then blot. Rinse thoroughly with water and blot until dry. |
| Shoe Polish | Apply Solvex or Sovall Spotter & blot. Apply Citrus Gel & blot. Rinse thoroughly with water & blot until dry |
| Tar & Asphalt | Scrape off as much as possible with blunt knife. Apply Solvall Spotter or Solvex and blot. Apply Citrus Gel and blot. Apply Neutral Pro-Spotter and blot then rinse thoroughly with water and blot until dry. |

Health and Safety

Please ensure that for all above referenced items, the manufacturers' use & safety instructions are adhered to.

Granwax Ezee Spot & Stain Remover can be obtained from Granwax Products Ltd; Telephone 01773 541177 Other products listed can be obtained from Prochem Europe Ltd; Telephone 020 8974 1515

EXPERIENCE CARPET TILES



Farfield Park, Manvers, Wath-upon-Dearne, Rotherham, S63 5DB T. +44 (0) 1709 763 839 E. sales@paragon-carpets.co.uk

www.paragon-carpets.co.uk

Samples Department: E. samples@paragon-carpets.co.uk T. +44 (0)1709 763 805

Showroom Address: Verco, Clerkenwell House, 67 Clerkenwell Road, Ground Floor East, London, EC1R 5BL

f Paragon Carpet Tiles



